

APP CRS	Rwy Idg	11500
281°	TDZE	1125
	Apt Elev	1203

RNAV (RNP) Z RWY 28L

PITTSBURGH INTL (PIT)


▼

For uncompensated Baro-VNAV systems procedure NA below -18°C (0°F) or above 54°C (130°F). Simultaneous approach authorized. GPS Required. For inoperative ALS, increase RNP 0.13 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 4000 on track 281° to CAKAT and track 256° to ELALE and track 223° to BOPGE and track 210° to HLG VOR/DME and hold.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON	CLNC DEL
ARR 127.25	123.95 360.8	128.3 291.7	SOUTH 121.9 348.6	126.75 353.7
DEP 135.9			NORTH 127.8 348.6	

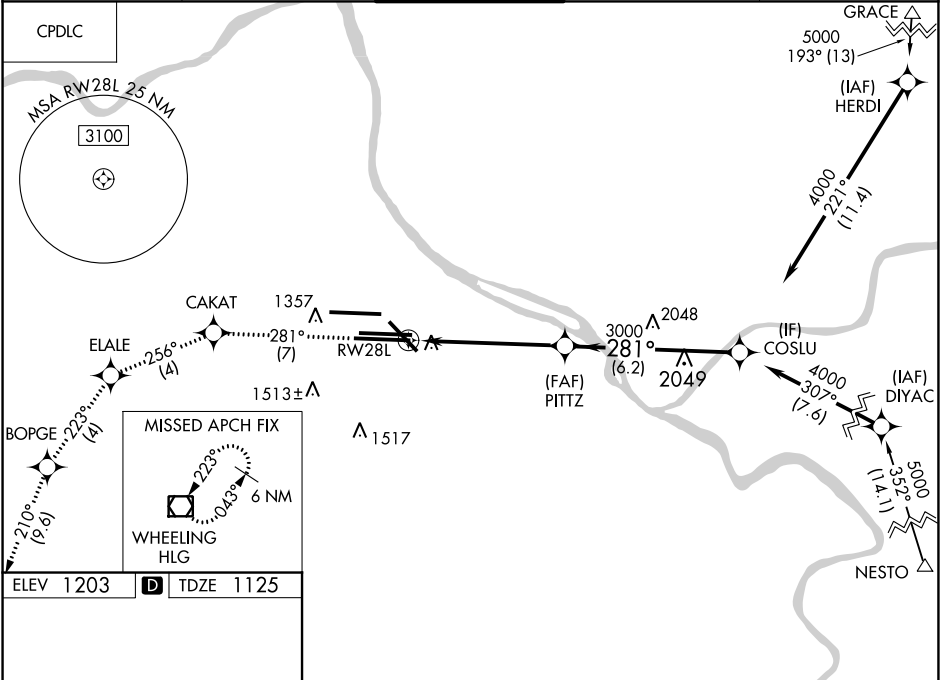

<p>REIL Rwy 10C HIRL all Rwys TDZ/CL Rwys 10L, 10R, 28L, 28R, 28C, and 32</p>	<div>4000 ↑ tr 281° CAKAT tr 256° ELALE tr 223° BOPGE tr 210° HLG COSLU</div> <div>VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).</div> <div><p>PITTZ 3000 281° 4000 GP 3.00° TCH 54</p><p>5.7 NM 6.2 NM</p></div> <table><tr><td>CATEGORY</td><td>A</td><td>B</td><td>C</td><td>D</td></tr><tr><td>RNP 0.13 DA</td><td colspan="2">1529/40</td><td colspan="2">404 (400-¾)</td></tr><tr><td>RNP 0.30 DA</td><td colspan="2">1579/45</td><td colspan="2">454 (400-¾)</td></tr></table> <div>AUTHORIZATION REQUIRED</div>	CATEGORY	A	B	C	D	RNP 0.13 DA	1529/40		404 (400-¾)		RNP 0.30 DA	1579/45		454 (400-¾)	
	CATEGORY	A	B	C	D											
	RNP 0.13 DA	1529/40		404 (400-¾)												
	RNP 0.30 DA	1579/45		454 (400-¾)												