

WAAS CH 53329 W12A	APP CRS 119°	Rwy Idg TDZE 1516 Apt Elev 1516
--	------------------------	---

RNAV (GPS) RWY 12

CLEARFIELD-LAWRENCE (FIG)


▼

▲

DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.
VDP NA with Dubois Rgnl altimeter setting. When local altimeter setting not received,
use Dubois Rgnl altimeter setting and increase all MDA 100 feet, increase LP Cat B
visibility ¼ mile and Cat C visibility ¼ mile, increase LNAV Cat C visibility ½ mile
and increase Circling Cats A/C visibility ¼ mile.

MISSED APPROACH:
Climb to 4000 direct
EBUME and hold.

ASOS 119.275	NEW YORK CENTER 134.8 338.3	UNICOM 122.725 (CTAF) 1
------------------------	---------------------------------------	-----------------------------------

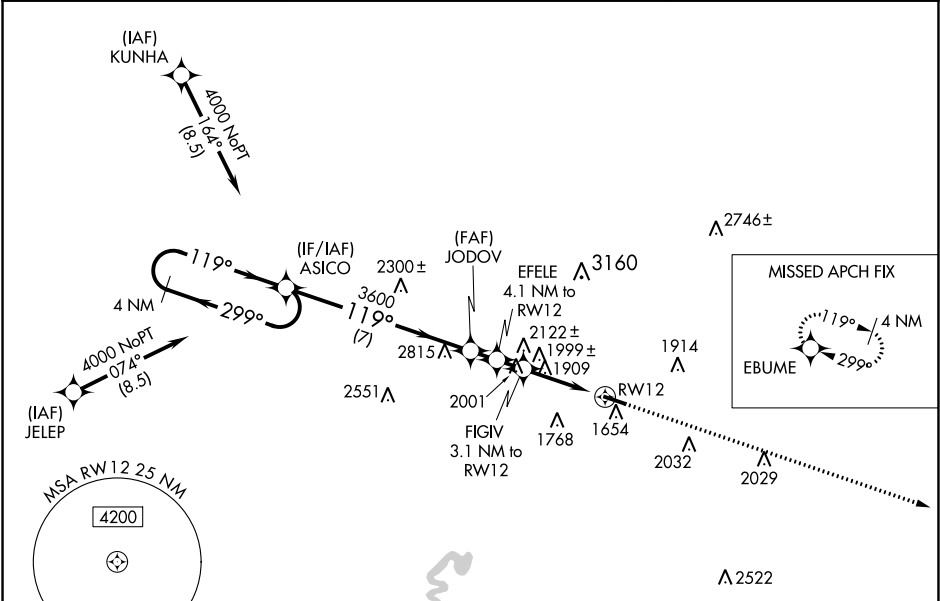

RADAR REQUIRED

ELEV 1516

TDZE 1516

VGSI and descent angles not coincident (VGSI Angle 3.10/TCH 29).

4000 EBUME

4NM Holding Pattern

ASICO

JODOV

EFELE

FIGIV

RWY 12

4000

299°

119°

3600

3200

2800

7 NM

1 NM

1 NM

1.2 NM

1.9 NM

CATEGORY	A	B	C	D
LP MDA	2160-1	644 (700-1)	2160-1½ 644 (700-1½)	NA
LNAV MDA	2260-1 744 (800-1)	2260-1¼ 744 (800-1¼)	2260-2 744 (800-2)	NA
CIRCLING	2260-1 744 (800-1)	2260-1¼ 744 (800-1¼)	2260-2¼ 744 (800-2¼)	NA

119° to RWY 12

4499 X 75

30

1656A

MIRL Rwy 12-30 1

REIL Rwy 30 1