RNAV (RNP) Z RWY 16

BELLINGHAM INTL (BLI)

APP CRS	Rwy Idg	6700
164°	TDZE	163
	Apt Elev	171

RNP AR APCH

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. For inop ALS, increase RNP 0.27 all Cats visibility to RVR 4500, increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct TECUV and hold.

ATIS	VICTORIA TERMINAL APP CON	BELLINGHAM TOWER★	GND CON	UNICOM
134.45	132.7 290.8	124.9 (CTAF) L 379.3	127.4 379.3	122.95

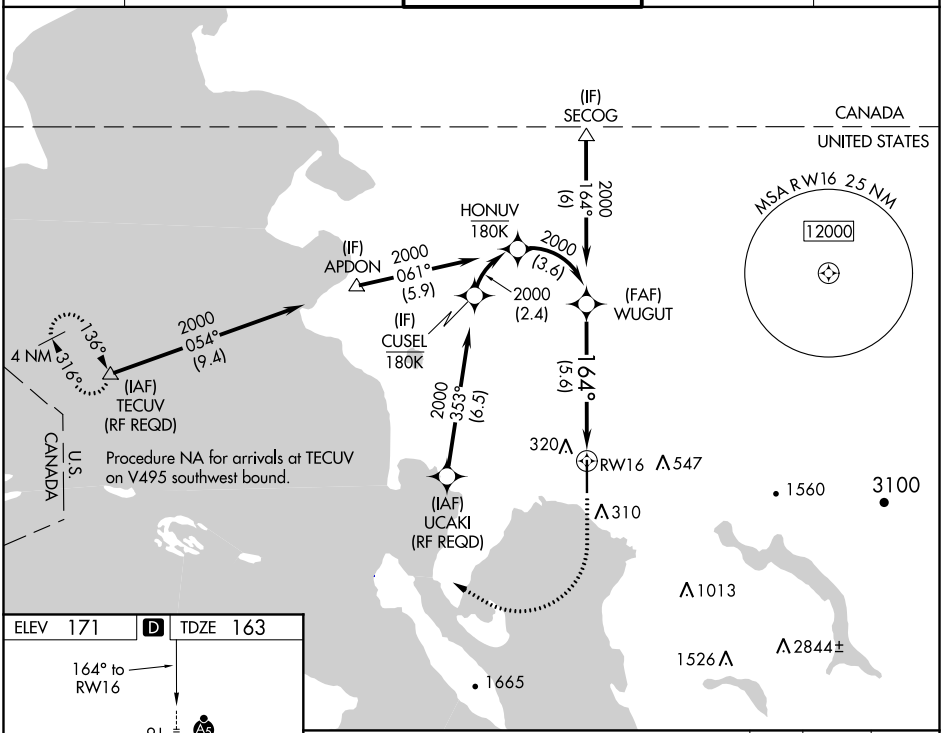

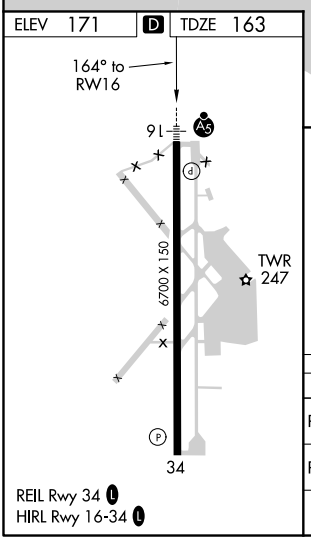

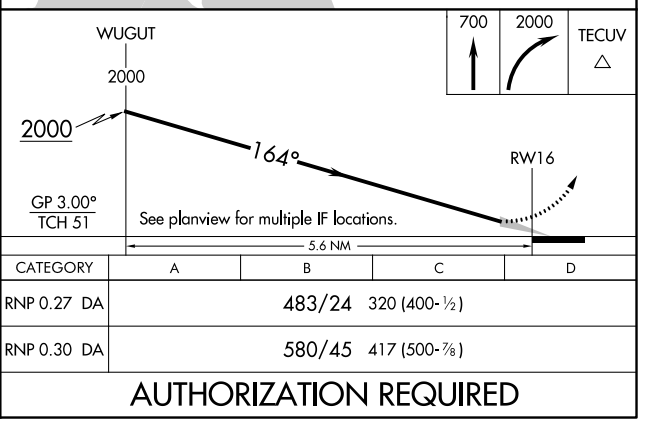

CATEGORY	A	B	C	D
RNP 0.27 DA	483/24 320 (400-½)			
RNP 0.30 DA	580/45 417 (500-⅞)			

AUTHORIZATION REQUIRED

NW-1, 31 DEC 2020 to 28 JAN 2021
NW-1, 31 DEC 2020 to 28 JAN 2021