

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>86306</b><br><b>W08A</b> | APP CRS<br><b>077°</b> | Rwy Idg <b>8679</b><br>TDZE <b>5344</b><br>Apt Elev <b>5350</b> |
|--|------------------------|---|

RNAV (GPS) RWY 8

CASPER/NATRONA COUNTY INTL (CPR)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 38°C (100°F).  
DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 7700 direct ROVEE and via track 015° to DDY VOR/DME and hold.

|                       |   |   |                         |                                |                         |
|-----------------------|---|---|-------------------------|--------------------------------|-------------------------|
| ATIS<br><b>126.15</b> | CASPER APP CON *<br><b>120.65 354.1</b> | CASPER TOWER *<br><b>118.3 (CTAF) 0 257.8</b> | GND CON<br><b>121.9</b> | CLNC DEL<br><b>121.9 257.8</b> | UNICOM<br><b>122.95</b> |
|-----------------------|---|---|-------------------------|--------------------------------|-------------------------|

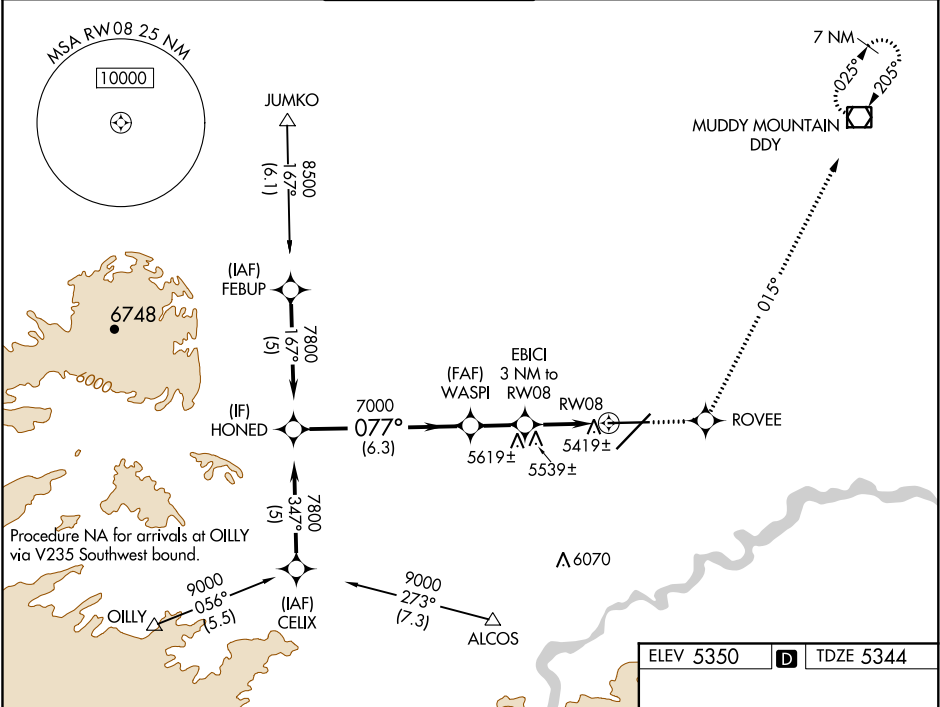

|   |         |             |              |             |
|---|---------|-------------|--------------|-------------|
| VGSi and RNAV glidepath not coincident (VGSi Angle 3.00 / TCH 104). |         |             |              |             |
| Procedure   | HONED   | WASPI       | EBICI        | ROVEE       |
| Turn NA   | 7800    | 7000        | 3 NM to RW08 | tr 015°     |
| GP 3.00°  |         |             |              |             |
| TCH 55  |         |             |              |             |
|   | 6.3 NM  | 2 NM        | 1.7 NM       | 1.3 NM      |
| CATEGORY  | A       | B           | C            | D           |
| LPV DA  | 5594/24 |             | 250 (300-½)  |             |
| LNAV/VNAV DA  | 5689/40 |             | 345 (400-¾)  |             |
| LNAV MDA  | 5800/24 | 456 (500-½) | 5800/40      | 5800/50     |
|   |         |             | 456 (500-¾)  | 456 (500-1) |
| CIRCLING  | 5800-1  | 450 (500-1) | 5800-1½      | 5900-2      |
|   |         |             | 450 (500-1½) | 550 (600-2) |

