


WAAS CH 70307 W27A	APP CRS 265°	Rwy Idg TDZE 6121 Apt Elev 6160	7985 6121 6160
----------------------------------------	------------------------	-----------------------------------------------------	-------------------------------------------

RNAV (GPS) RWY 27

CHEYENNE RGNL/JERRY OLSON FIELD (CYS)

RNP APCH.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C. For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4000. # RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 6600, then climbing right turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.
-----------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------	---------------------------------------------------------------------------------------------------------------------------

ATIS 134.425 278.3	CHEYENNE APP CON★ 124.55 263.075	CHEYENNE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
------------------------------	--------------------------------------------	-------------------------------------------------	---------------------------------	-------------------------

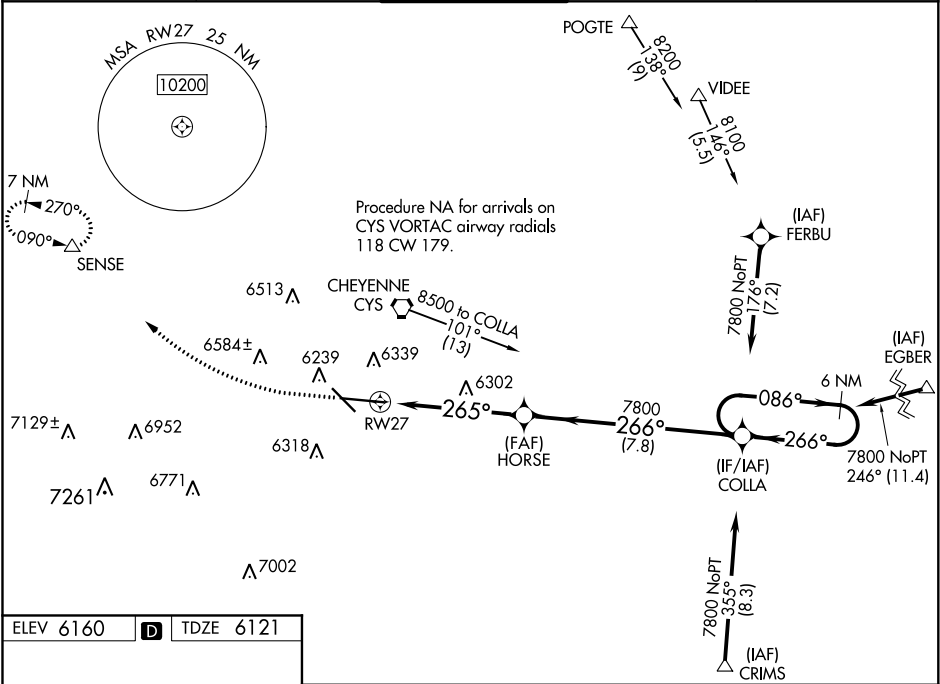

 TWR 6256 6218 A, 6219 A, 6189 A, 6221 A, 6171 A, 6280 A 9270 X 150 0.7% UP 0.4% DOWN 265° to RW27		 6600 10400 SENSE		 HORSE COLLA 6 NM Holding Pattern	
* LNAV only RW27 1.3 NM to RW27		* 1.3 NM to RW27		7800 266° 7800 086° 266° 7800 GP 3.00° TCH 55	
CATEGORY	A	B	C	D	
LPV DA#	6321/24 200 (200-½)				
LNAV/VNAV DA	6376/24 255 (300-½)				
LNAV MDA	6560/24 439 (400-½)		6560/40 439 (400-¾)		
CIRCLING	6640-1 480 (500-1)		6900-2 740 (800-2)		6920-2½ 760 (800-2½)