

WAAS CH <b>82712</b> <b>W11A</b>	APP CRS <b>112°</b>	Rwy Idg <b>5126</b> TDZE <b>1487</b> Apt Elev <b>1497</b>
--	------------------------	---

RNAV (GPS) RWY 11

EASTERN OREGON RGNL AT PENDLETON (PDT)

RNP APCH.

▼


⚠

❄ -22°C

Baro-VNAV and VDP NA when using Walla Walla altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Walla Walla altimeter setting and increase all DA/MDA 120 feet; VNAV all Cats visibility 1/8 SM, LNAV Cat C visibility 3/8 SM, and Cat D visibility 1/8 SM, Circling Cat C visibility 1/4 SM and Circling Cat D visibility 1/2 SM.

MISSED APPROACH:  
Climb to 5000 direct  
ADXAB and on track  
007° to ZUTED and hold.

ASOS <b>118.325</b>	CHINOOK APP CON <b>133.15 379.15</b>	PENDLETON TOWER <b>119.7 (CTAF) 257.8</b>	GND CON <b>121.9 257.8</b>	UNICOM <b>122.95</b>
------------------------	---	--	-------------------------------	-------------------------

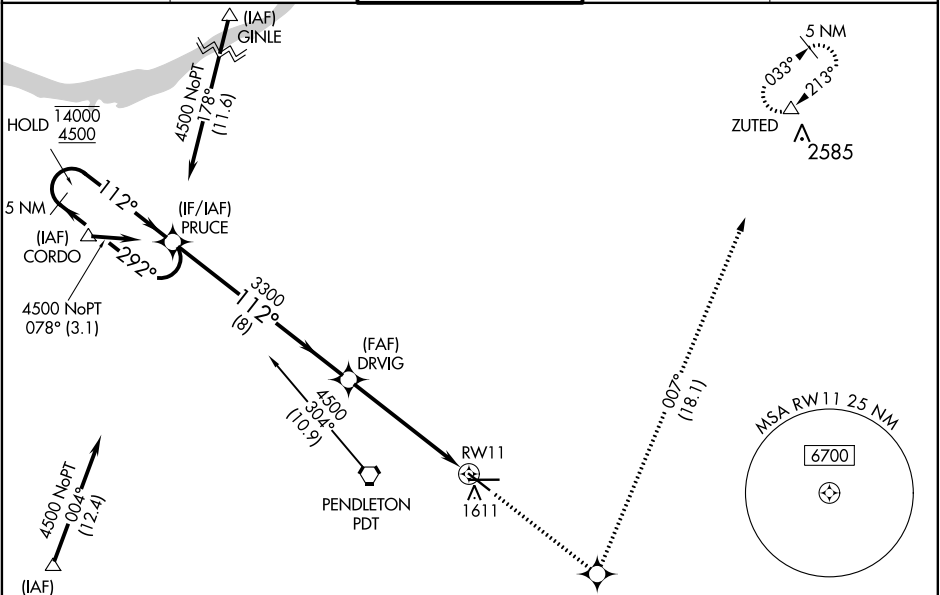

5 NM Holding Pattern

PRUCE

14000 ← 292°  
4500 → 112°

GP 3.00°  
TCH 43

5000

ADXAB

ZUTED

tr 007°

\* LNAV only

DRVIG

3300

\* 1 NM to RWY 11

RWY 11

8 NM

4.5 NM

1 NM

CATEGORY	A	B	C	D
LPV DA	1737-1 250 (300-1)			
LNAV/VNAV DA	1850-1¼ 363 (400-1¼)			
LNAV MDA	1860-1 373 (400-1)			1860-1¼ 373 (400-1¼)
CIRCLING	1920-1 423 (500-1)	1960-1 463 (500-1)	1980-1½ 483 (500-1½)	2200-2¼ 703 (800-2¼)

REIL Rwy 11 and 29

MIRL Rwy 11-29

HIRL Rwy 8-26