


APP CRS	Rwy Idg	9002
206°	TDZE	4735
	Apt Elev	4744

RNAV (RNP) Z RWY 21

IDAHO FALLS RGNL (IDA)

RNP AR APCH. RF required.	MALSR	MISSED APPROACH: Climb to 7500 on track 206° to UGADE right turn to STOPS then on track 259° to ROCCA and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -27°C or above 49°C. For inop ALS increase RNP 0.11 visibility all Cats to RVR 4500, increase RNP 0.30 visibility all Cats to RVR 5000.		

ATIS	SALT LAKE CENTER	IDAHO FALLS TOWER*	GND CON	CLNC DEL	GCO	UNICOM
135.325	128.35 239.25	118.5 (CTAF) 0 257.8	121.7	121.7	121.725	122.95

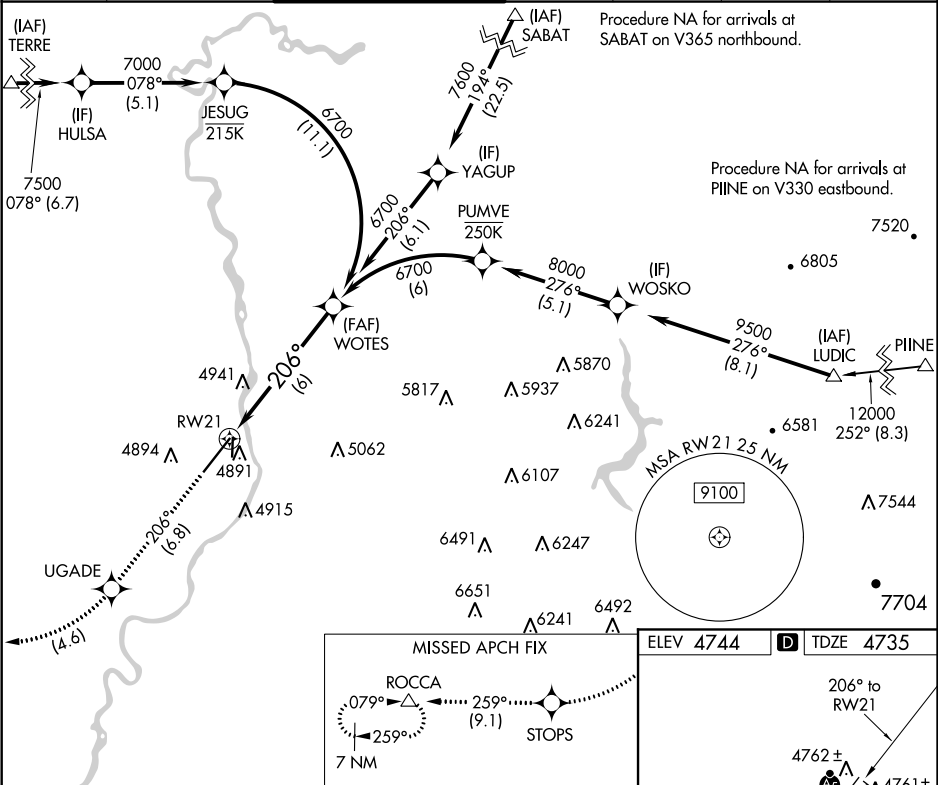

7500	UGADE	STOPS	ROCCA	WOTES
tr 206°			tr 259°	6700
See planview for multiple IF locations.				
6 NM				
CATEGORY	A	B	C	D
RNP 0.11 DA	5011/24 276 (300-½)			
RNP 0.30 DA	5064/24 329 (400-½)			
AUTHORIZATION REQUIRED				
REIL Rwy 3 0 HIRL Rwy 3-21 0 MIRL Rwy 17-35				