LOM AW	APP CRS	Rwy Idg	5332
382	342°	TDZE	135
		Apt Elev	137

NDB RWY 34

ARLINGTON MUNI (AWO)

T A NA — When local altimeter setting not received, use Whidbey Island NAS (Ault Field) altimeter setting and increase all MDA 80 feet and increase S-34 Cats B, C, and D visibility ¼ mile and increase Circling Cat B and D visibility ¼ mile and Cat C visibility ½ mile. For inoperative MALS, increase S-34 Cat D visibility to 2. For inoperative MALS when using Whidbey Island NAS (Ault Field) altimeter setting, increase S-34 Cats C and D visibility to 2½.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct AW LOM and hold.

AWOS-3PT	SEATTLE APP CON	CLNC DEL	CTAF
135.625	128.5 306.9	121.725	122.725 L

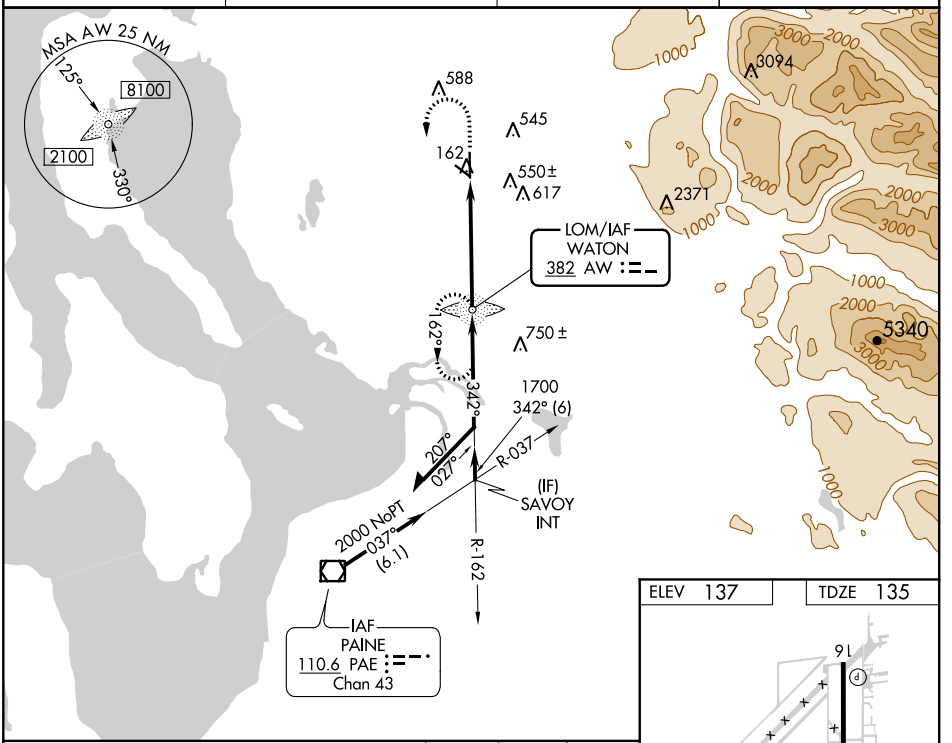

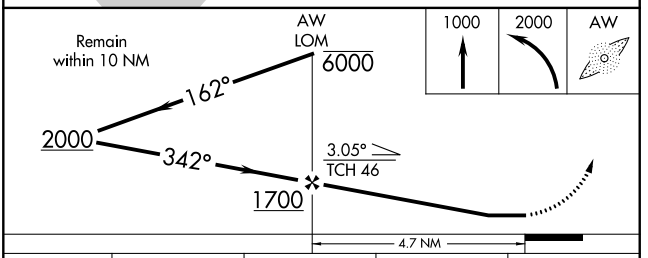

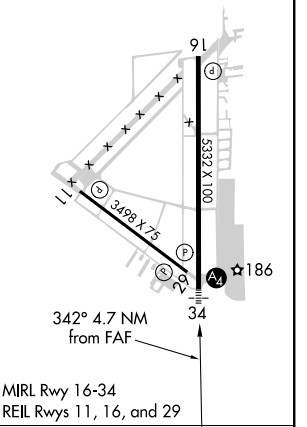

MIRL Rwy 16-34
REIL Rwys 11, 16, and 29

CATEGORY	A	B	C	D
S-34	860-¾ 725 (800-¾)		860-1¾ 725 (800-1¾)	
CIRCLING	860-1 723 (800-1)		860-2 723 (800-2)	920-2½ 783 (800-2½)

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

NW-1, 31 DEC 2020 to 28 JAN 2021
NW-1, 31 DEC 2020 to 28 JAN 2021