

WAAS CH 58306 W18A	APP CRS 181°	Rwy ldg 11602 TDZE 250 Apt Elev 254
--	------------------------	--



RNAV (GPS) RWY 18

ARKANSAS INTL (BYH)

Inop table does not apply. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ mile.

MISSED APPROACH: Climb to 2500 direct HABSI and hold.

MEMPHIS CENTER 134.65 316.15	UNICOM 122.7 (CTAF) 0
--	---------------------------------

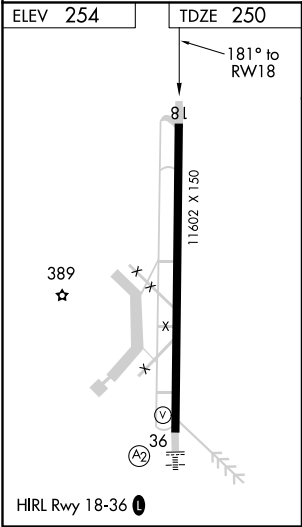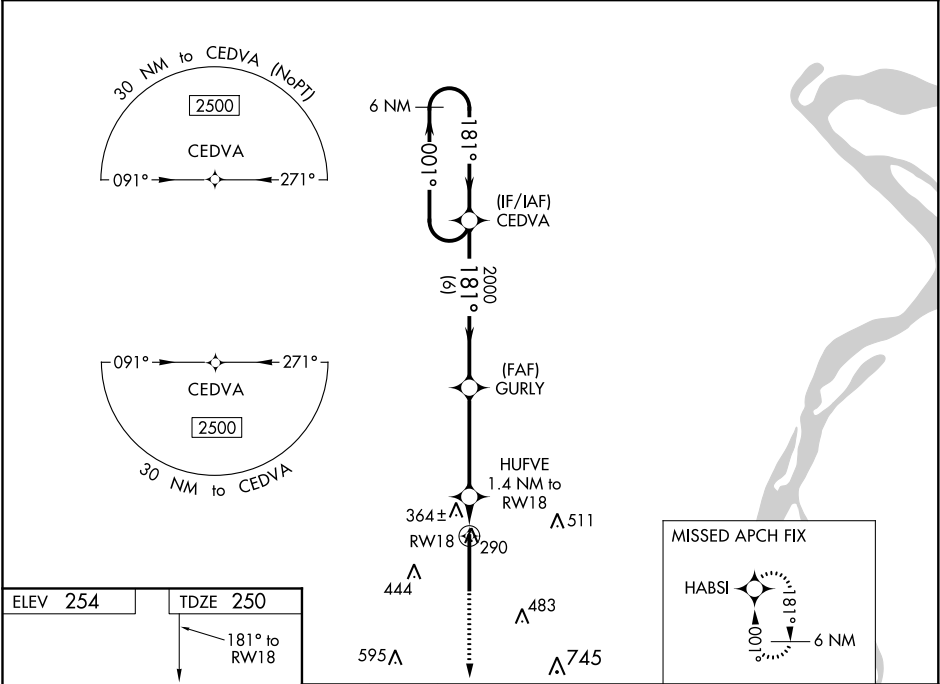

2500

HABSI

↑

*LNAV only.

HUFVE
1.4 NM to
RW18

GURLY
2000

CEDVA

6 NM
Holding Pattern

001° → 2500

← 181°

181°

GP 3.00°
TCH 54

RW18

*740

2000

1.4 NM

3.9 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	450-¾		200 (200-¾)	
LNAV/VNAV DA	545-1		295 (300-1)	
LNAV MDA	620-1		370 (400-1)	
CIRCLING	700-1	720-1	800-1½	820-2
	446 (500-1)	466 (500-1)	546 (600-1½)	566 (600-2)

SC-1, 31 DEC 2020 to 28 JAN 2021

SC-1, 31 DEC 2020 to 28 JAN 2021