

LOC/DME I-LIK 110.7 Chan 44	APP CRS 356°	Rwy Idg 9800 TDZE 1276 Apt Elev 1296	ILS or LOC RWY 35L WILL ROGERS WORLD (OKC)
---	------------------------	---	---




Simultaneous approach authorized. For inop ALS, increase S-ILS 35L Cat E visibility to RVR 4000 and S-LOC 35L all Cats visibility to RVR 5500. DME required.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MAJLRS



MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 on heading 291° and on PWA VOR/DME R-216 to JESKE INT/PWA 14.5 DME and hold.

D-ATIS 125.85	OKE CITY APP CON 124.6 266.8	ROGERS TOWER 119.35 269.45	GND CON 121.9 348.6	CLNC DEL 124.35
-------------------------	--	--------------------------------------	-------------------------------	---------------------------

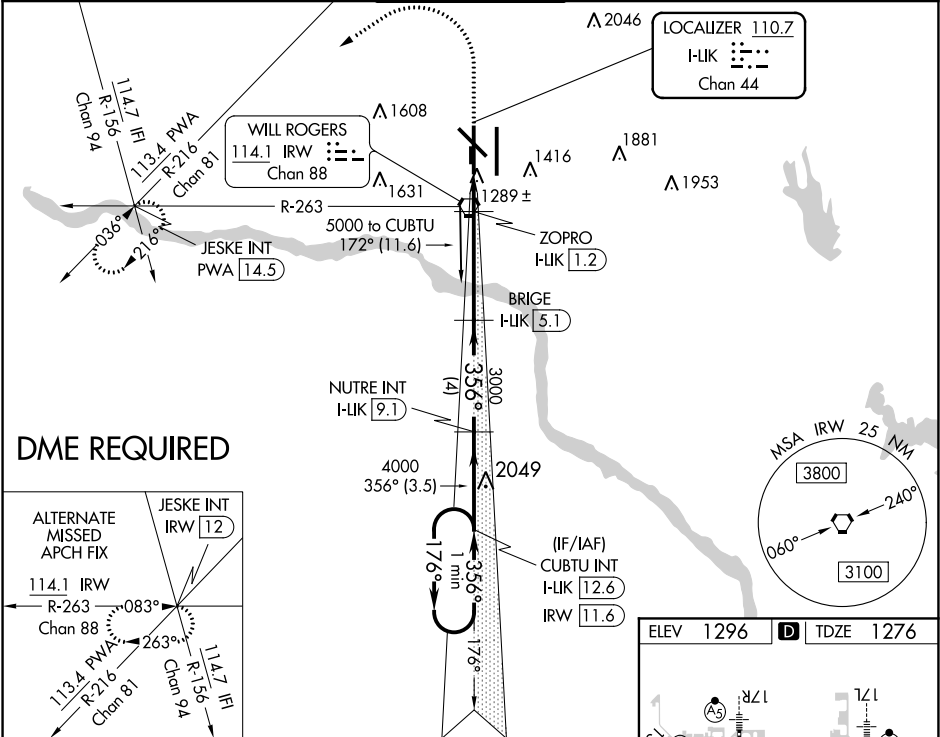

One Minute Holding Pattern		CUBTU INT I-LIK 12.6		NUTRE INT I-LIK 9.1		BRIGE I-LIK 5.1		ZOPRO I-LIK 1.2		PWA R-216		JESKE INT	
5000		176°		356°		356°		3000		3000		3000	
Use I-LIK DME when on localizer course.		GS 3.00°		TCH 49		3.5 NM		4 NM		3.9 NM		1.4 NM	
CATEGORY		A		B		C		D		E			
S-ILS 35L **				1476/24		200 (200-½)							
S-LOC 35L		1640/24		364 (400-½)		1640/35		364 (400-%)					
CIRCLING		1740-1		1760-1		1960-1¾		2000-2¼		2240-3			
		444 (500-1)		464 (500-1)		664 (700-1¾)		704 (800-2¼)		944 (1000-3)			

REIL Rwy 13 and 31
TDZ/CL Rwy 35R
MIRL Rwy 13-31
HIRL Rwy 17L-35R and 17R-35L