WAAS	APP CRS	Rwy Idg	4559
Ch 49199	310°	TDZE	390
W31A		Apt Elev	390

RNAV (GPS) RWY 31

TEXARKANA RGNL-WEBB FIELD (TXK)

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). When local altimeter setting not received, use J Lynn Helms Sevier County altimeter setting and increase all DA/MDA 100 feet, increase LPV and LNAV/VNAV all Cats, and LNAV Cat C visibility ¼ mile, LNAV Cat D visibility ½ mile and circling Cat C and D visibility ¼ mile. Baro-VNAV NA when using J Lynn Helms Sevier County altimeter setting. When VGSI inoperative, procedure NA at night.

MISSED APPROACH: Climb to 2000 direct JELGA and hold.

ATIS	FORT WORTH CENTER	TEXARKANA TOWER ★	GND CON
120.2	123.925 269.475	123.875 (CTAF) L 235.625	119.225

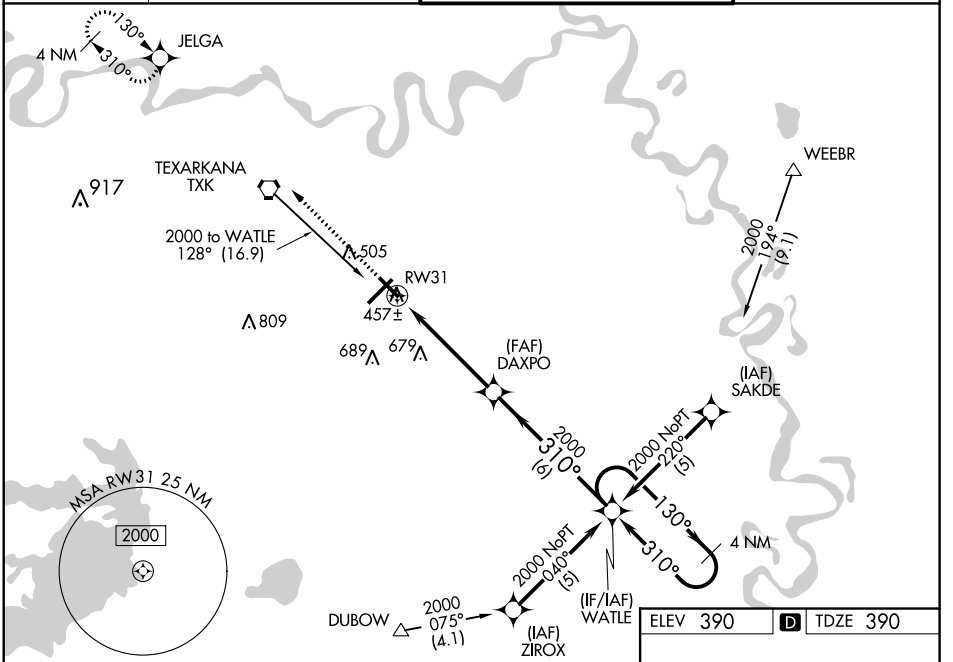

ELEV 390 D TDZE 390

2000 JELGA VGSI and RNAV glidepath not coincident.

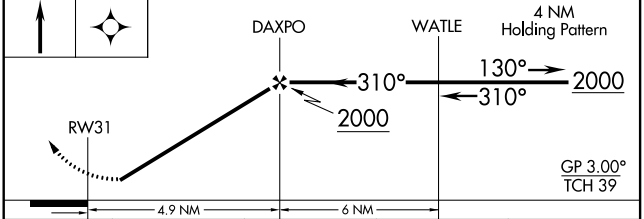



CATEGORY	A	B	C	D
LPV DA	645-1 255 (300-1)			
LNAV/VNAV DA	707-1¼ 317 (400-1¼)			
LNAV MDA	920-1 530 (600-1)		920-1½ 530 (600-1½)	920-1¾ 530 (600-1¾)
CIRCLING	920-1 530 (600-1)		920-1½ 530 (600-1½)	1000-2 610 (700-2)

MIRL Rwy 13-31 L
HIRL Rwy 4-22 L

SC-1, 31 DEC 2020 to 28 JAN 2021
SC-1, 31 DEC 2020 to 28 JAN 2021