# RNAV (GPS) RWY 18

WALNUT RIDGE RGNL (ARG)

| WAAS | APP CRS | Rwy Idg | 5001 |
|---|---|---|---|
| CH 65925 | 179° | TDZE | 275 |
| W18A | | Apt Elev | 279 |

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jonesboro altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ¼ mile and LNAV Cat C and D visibility ⅛ mile. For inoperative ODALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. When using Jonesboro altimeter setting; for inoperative ODALS, increase LPV all Cats visibility to ⅞ mile, LNAV/VNAV all Cats visibility to 1 mile and LNAV Cat C and D visibility to 1⅛ mile. Baro-VNAV and VDP NA with Jonesboro altimeter setting.

ODALS

MISSED APPROACH: Climb to 3100 direct GUBFO and hold.

| AWOS-3PT | MEMPHIS CENTER | UNICOM |
|---|---|---|
| 135.925 | 120.075 289.4 | 122.8 (CTAF) L |

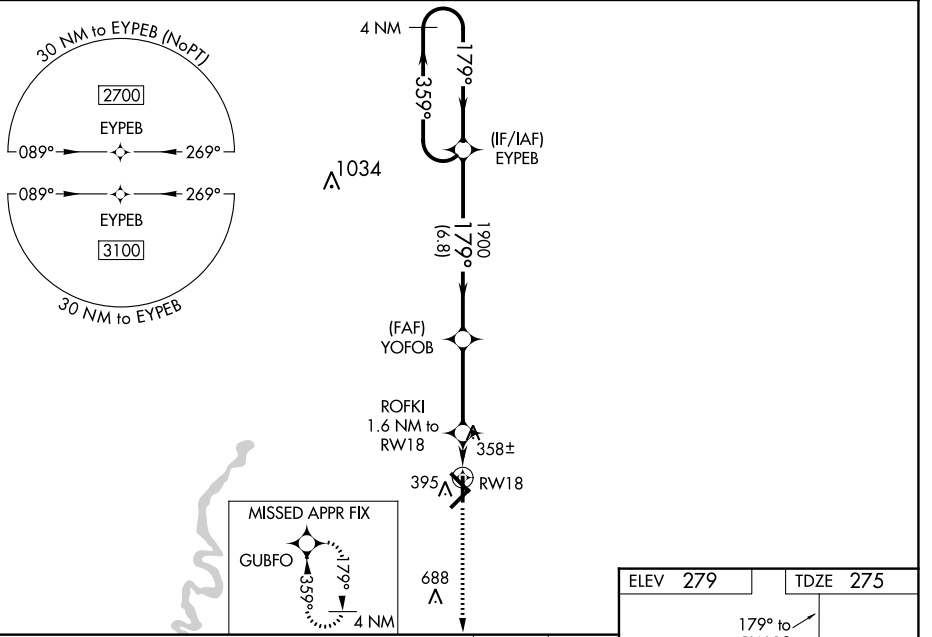


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 475-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 525-¾ 250 (300-¾) | | | |
| LNAV MDA | 620-¾ 345 (400-¾) | | 620-⅞ 345 (400-⅞) | |
| CIRCLING | 760-1 481 (500-1) | | 760-1½ 481 (500-1½) | 840-2 561 (600-2) |

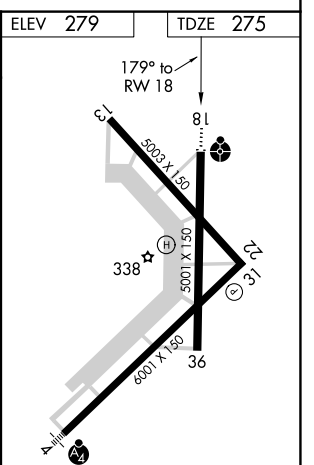


REIL Rwy 18 L

MIRL Rwy 4-22, 18-36 L



SC-1, 31 DEC 2020 to 28 JAN 2021
SC-1, 31 DEC 2020 to 28 JAN 2021