RNAV (GPS) RWY 34

FORT WORTH MEACHAM INTL (FTW)

WAAS	APP CRS	Rwy Idg	7202
CH 53412	344°	TDZE	680
W34A		Apt Elev	710

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS, increase LNAV/VNAV Cat D and LNAV Cat D visibility to 1⅜ mile.

MALS (A4)

MISSED APPROACH: Climb to 3000 direct WOROD and hold.

ATIS	REGIONAL APP CON	MEACHAM TOWER	GND CON	CLNC DEL
120.7	(North) 118.1 306.95 (South) 135.975 379.9	118.3 257.8	121.9	124.65

MISSED APCH FIX

4 NM 164° 344° WOROD

1049 990 913 1022 RW34 1049 853 1198 1743

WAGMU 2.6 NM to RW34

(FAF) DOJED

344° (6) 2200

(IF/IAF) PAXXE

164°

3000 NoPT 039° (5.4)

(IAF) CURLE

344° 4 NM

1772 3000 NoPT 354° (11.9)

(IAF) BARGO

MSA RW34 25 NM 3600

ELEV 710 D TDZE 680

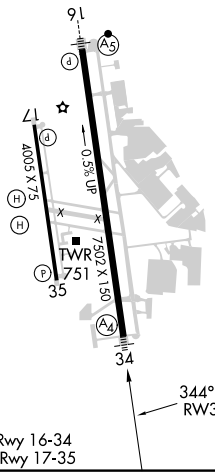

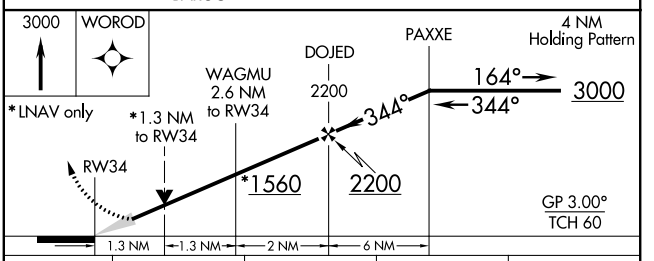

CATEGORY	A	B	C	D
LPV DA	880-¾ 200 (200-¾)			
LNAV/VNAV DA	1091-1⅛ 411 (400-1⅛)			
LNAV MDA	1160-¾ 480 (500-¾)		1160-1⅛ 480 (500-1⅛)	
C CIRCLING	1260-1 550 (600-1)	1280-1 570 (600-1)	1340-1¾ 630 (700-1¾)	1500-2½ 790 (800-2½)

SC-2, 31 DEC 2020 to 28 JAN 2021
SC-2, 31 DEC 2020 to 28 JAN 2021