TOP ALTITUDE: 2000

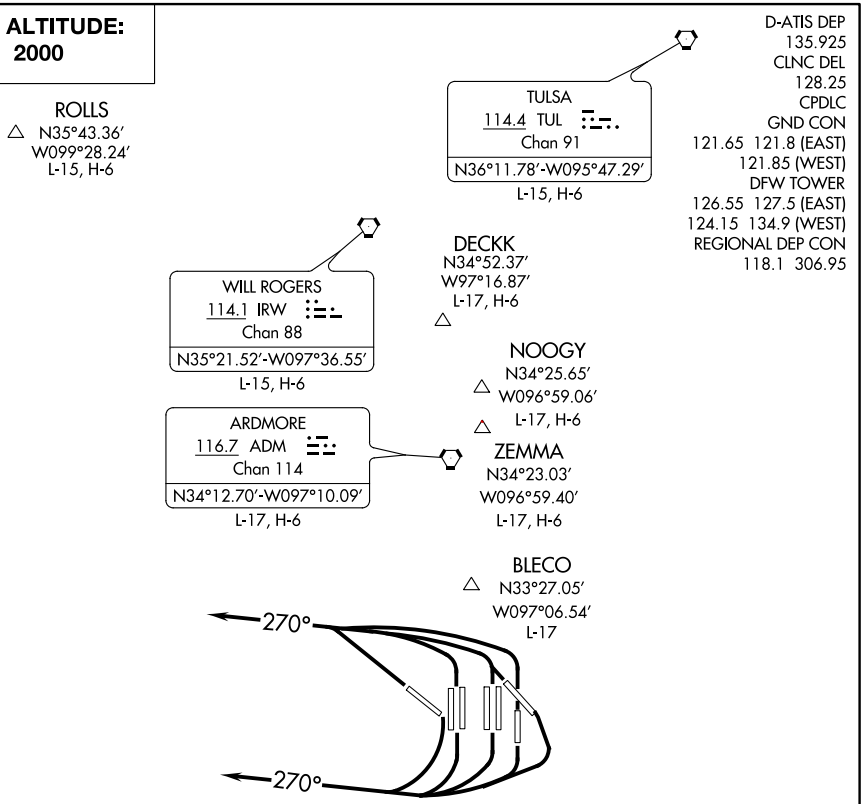

NOTE: Applicable in RADAR environment and for non-turbojet aircraft only.

TAKEOFF MINIMUMS

Rwys 13L/R, 17L/C/R, 18L/R, 31L/R, 35L/C, 36L/R: Standard
Rwy 35R: 300-1½ or standard with minimum climb of 221′ per NM to 800, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 1700′ prior to DER.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

NON-TURBOJET AIRCRAFT ONLY

TAKEOFF ALL RUNWAYS: Fly heading 270°, expect vector to appropriate fix, maintain 2000 and expect filed altitude ten minutes after departure.

SC-2, 31 DEC 2020 to 28 JAN 2021
SC-2, 31 DEC 2020 to 28 JAN 2021