
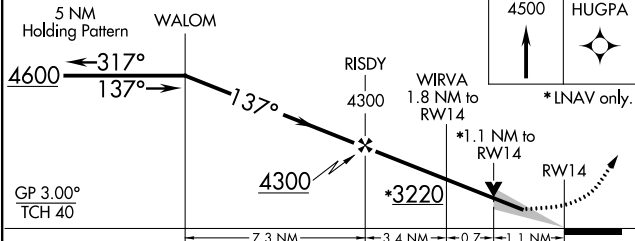



**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 27°C (80°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Wink altimeter setting. When local altimeter setting not received, use Wink altimeter setting and increase all DA 95 feet and all MDA 100 feet, increase LPV all Cats visibility ¼ mile, LNAV VNAV all Cats visibility ¾ mile, LNAV Cat C/D and Circling Cat C visibility ¼ mile. Circling to Rwy 9/27 NA at night.

**MISSED APPROACH:**  
Climb to 4500 direct HUGPA and hold.

AWOS-3 <b>118.175</b>	ALBUQUERQUE CENTER <b>135.875 292.15</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---	---------------------------------

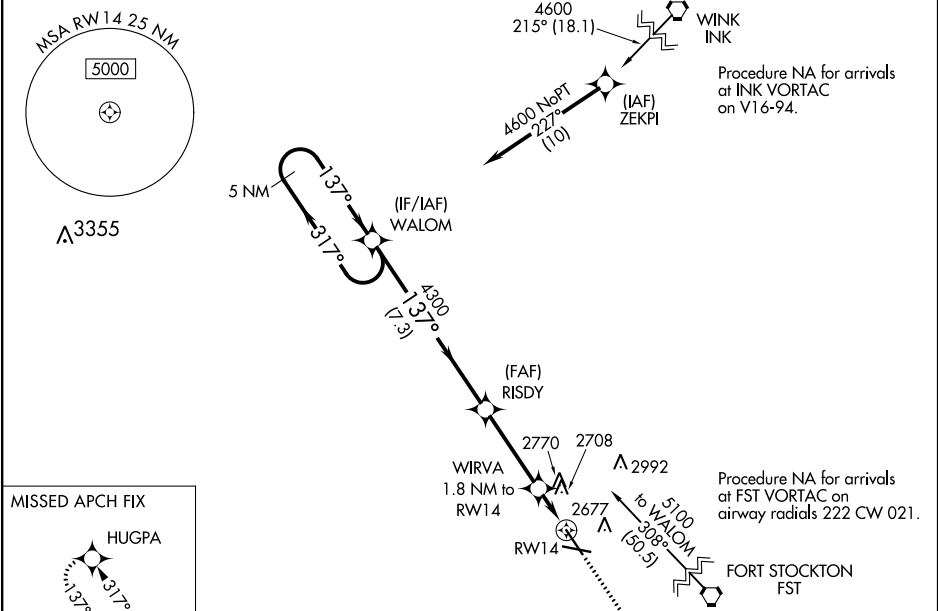

CATEGORY	A	B	C	D
LPV DA		2808-¾ 200 (200-¾)		
LNAV/VNAV DA		2900-1 292 (300-1)		
LNAV MDA	3000-1 392 (400-1)		3000-1½ 392 (400-1½)	
CIRCLING	3080-1 467 (500-1)		3120-1½ 507 (600-1½)	3180-2 567 (600-2)

