RNAV (GPS) RWY 21

SAN ANGELO RGNL/MATHIS FIELD (SJT)

WAAS	APP CRS	Rwy Idg	5940
CH 81817	218°	TDZE	1906
W21A		Apt Elev	1919

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling NA for Cat E west of Rwy 18-36. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV Cat A/B/E visibility to 1 SM; increase LNAV Cat E visibility to 1¼ SM.

ODALS

MISSED APPROACH: Climb to 4400 direct HEXPE and hold.

ATIS	SAN ANGELO APP CON ★	MATHIS TOWER ★	GND CON	UNICOM
128.45 319.0	125.35 354.1	118.3 (CTAF) L 284.7	121.9 348.6	122.95

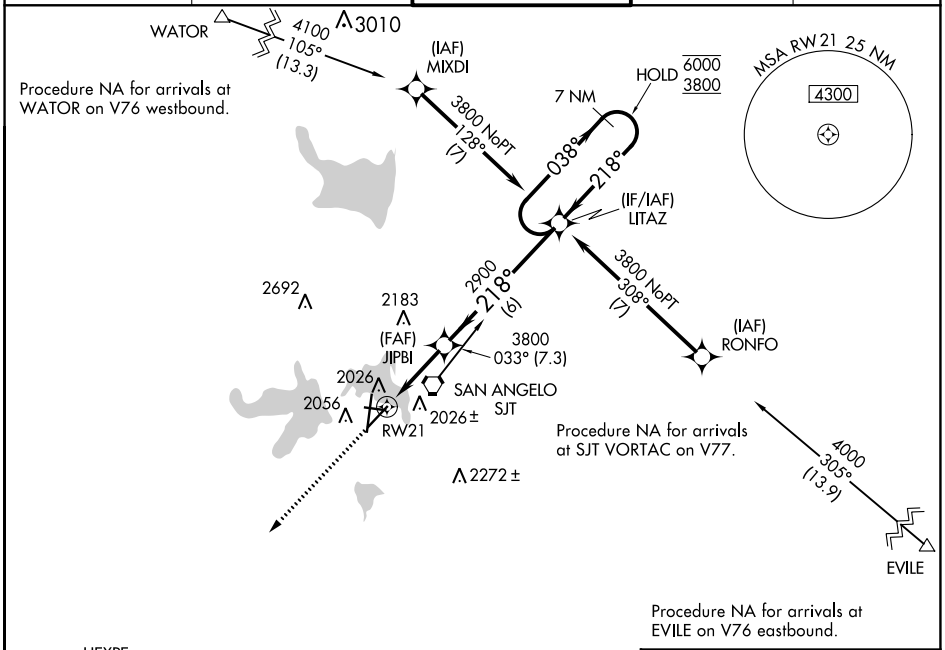

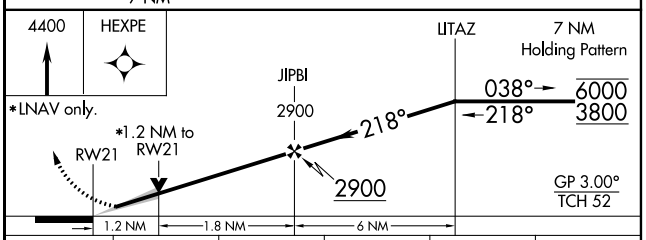

CATEGORY	A	B	C	D	E
LPV DA	2106-¾ 200 (200-¾)				
LNAV/VNAV DA	2250-⅞ 344 (400-⅞)				
LNAV MDA	2340-¾ 434 (500-¾)		2340-1⅛ 434 (500-1⅛)		
C CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)

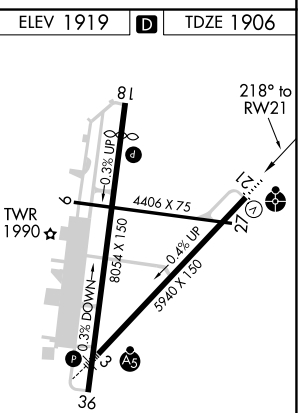

REIL Rwy 18 L
HIRL Rwy 3-21 L
MIRL Rwys 9-27 and 18-36 L

SC-3, 31 DEC 2020 to 28 JAN 2021
SC-3, 31 DEC 2020 to 28 JAN 2021