RNAV (GPS) Y RWY 31L

SAN ANTONIO INTL (SAT)

WAAS	APP CRS		
CH 61209	308°	Rwy Idg	8502
W31A		TDZE	790
		Apt Elev	809

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). Circling NA west of Rwys 4 and 13R. DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to 1⅜ SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cats C and D visibility to 1⅝ SM .

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct ALAMO LOM and hold.

D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

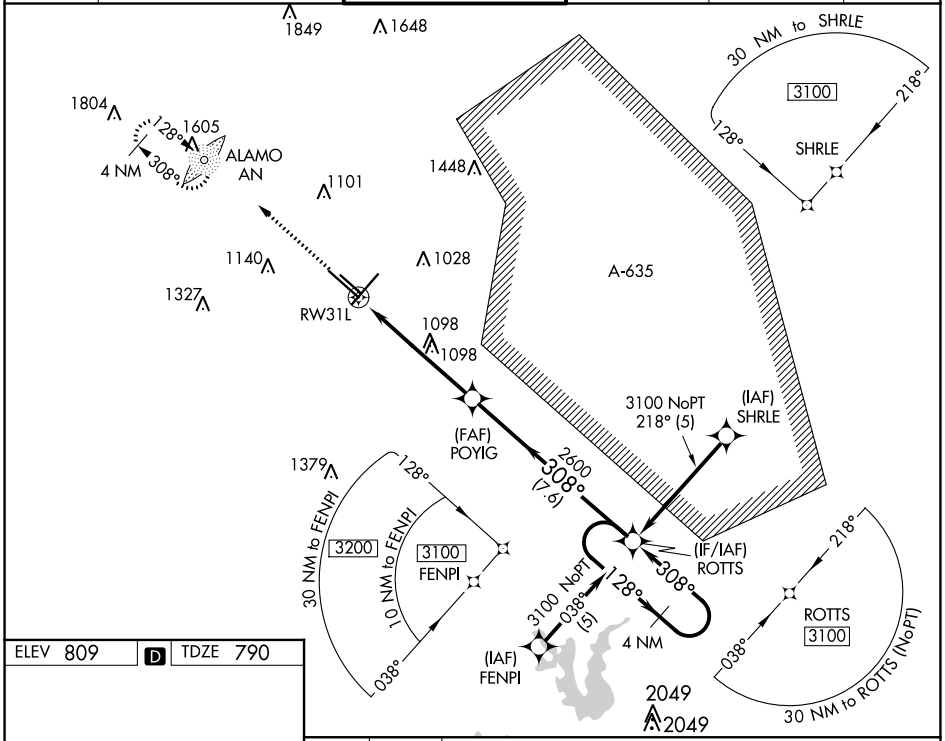

ELEV 809 | D | TDZE 790



TDZ/CL Rwy 13R
REIL Rwys 13L, 22 and 31R
MIRL Rwy 13L-31R
HIRL Rwys 4-22 and 13R-31L

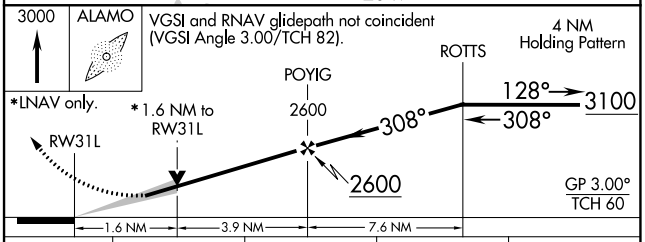

CATEGORY	A	B	C	D
LPV DA	1207/50 417 (400-1)			
LNAV/VNAV DA	1246/60 456 (500-1¼)			
LNAV MDA	1360/24 570 (600-½)		1360-1¼ 570 (600-1¼)	
CIRCLING	1360-1 551 (600-1)		1360-1¾ 551 (600-1¾)	1380-2 571 (600-2)

SC-3, 31 DEC 2020 to 28 JAN 2021
SC-3, 31 DEC 2020 to 28 JAN 2021