



ATIS ★
120.825
CLNC DEL (when twr closed)
121.35
GND CON
120.125
SAN MARCOS TOWER ★
126.825
AUSTIN DEP CON
119.0 370.85

TOP ALTITUDE:
ASSIGNED BY ATC

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV-1.

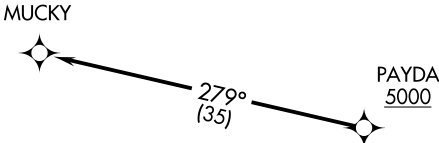

TAKEOFF MINIMUMS:
Rwys 8, 13, 17, 26: Standard.
Rwy 31: Standard with minimum climb of 210' per NM to 2600.
Rwy 35: Standard with minimum climb of 230' per NM to 2600.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 8: Climb heading 081° or as assigned by ATC for RADAR vectors to PAYDA at or above 5000, thence....
TAKEOFF RUNWAY 13: Climb heading 126° or as assigned by ATC for RADAR vectors to PAYDA at or above 5000, thence....
TAKEOFF RUNWAY 17: Climb heading 171° or as assigned by ATC for RADAR vectors to PAYDA at or above 5000, thence....
TAKEOFF RUNWAY 26: Climb heading 261° or as assigned by ATC for RADAR vectors to PAYDA at or above 5000, thence....
TAKEOFF RUNWAY 31: Climb heading 306° or as assigned by ATC for RADAR vectors to PAYDA at or above 5000, thence....
TAKEOFF RUNWAY 35: Climb heading 351° or as assigned by ATC for RADAR vectors to PAYDA at or above 5000, thence....

...on track 279° to MUCKY. Maintain altitude assigned by ATC. Expect filed altitude 10 minutes after departure.

SC-3, 31 DEC 2020 to 28 JAN 2021

SC-3, 31 DEC 2020 to 28 JAN 2021