

WAAS CH 69617 W36A	APP CRS 355°	Rwy Idg TDZE Apt Elev	6080 40 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 36
CORPUS CHRISTI INTL (CRP)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all
A Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.
RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR





MISSED APPROACH: Climb to 2000 direct FEKEL and on track 304° to ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348,725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

MISSED APCH FIX




ELEV	46	D	TDZE	40
------	----	----------	------	----

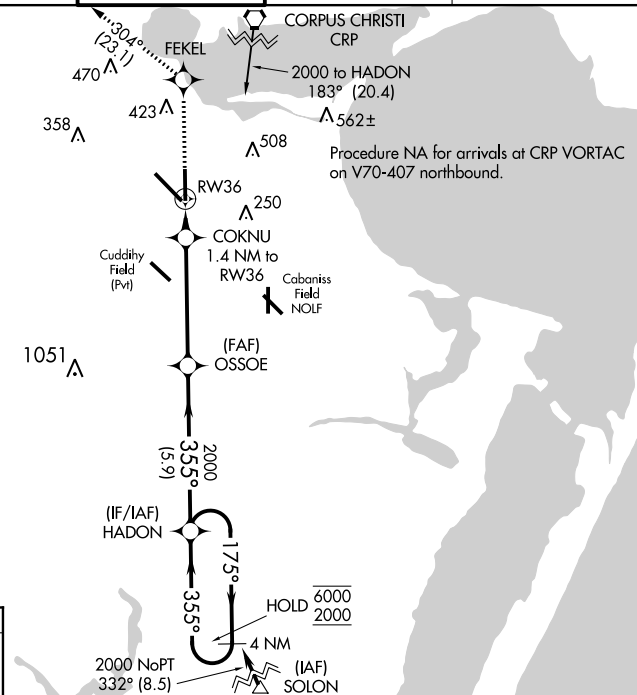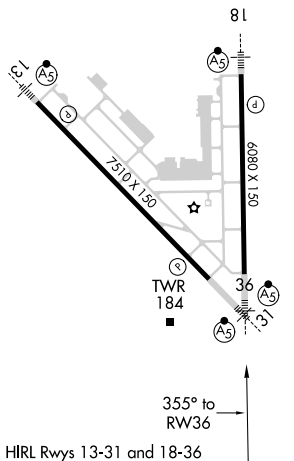

2000 ↑	FEKEL 	tr 304°	ATHIS △	OSSOE 	HADON 	4 NM Holding Pattern
-----------	--	------------	------------	-----------	-----------	-------------------------

*LNAV only.

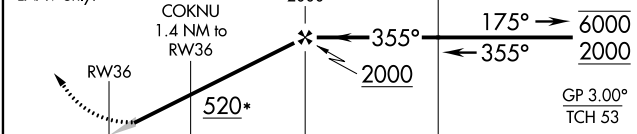

		1.4 NM	4.6 NM	5.9 NM		
CATEGORY	A	B	C	D	E	
LPV DA #	240/24		200 (200-½)			
LNAV/ VNAV DA	356/24		316 (400-½)			
LNAV MDA	440/24	400 (400-½)	440/35		400 (400-¾)	
C CIRCLING	500-1 454 (500-1)	580-1 534 (600-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)	