
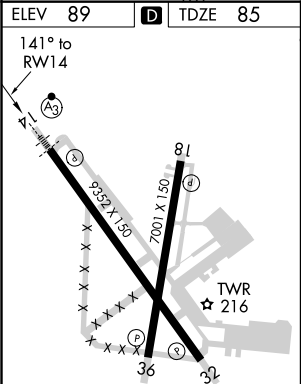


WAAS CH 56417 W14A	APP CRS 141°	Rwy Idg 9352 TDZE 85 Apt Elev 89
--	------------------------	---

RNAV (GPS) RWY 14
ALEXANDRIA INTL (AEX)

<p>▼ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). For inop SSALR increase LNAV Cat D visibility to RVR 6000. RADAR required when R-3801 A-B in use. **RVR 1800 authorized with use of FD or AP or HUD to DA.</p>	<p>SSALR </p>	<p>MISSED APPROACH: Climb to 4000 direct EHHIR and via track 106° to MUSHE and hold.</p>
---	-------------------	--

ASOS 123.975	POLK APP CON 125.4 254.8	ALEXANDRIA TOWER 127.35 (CTAF) 269.2	GND CON 121.9 372.0	CLNC DEL 121.9
------------------------	------------------------------------	--	-------------------------------	--------------------------

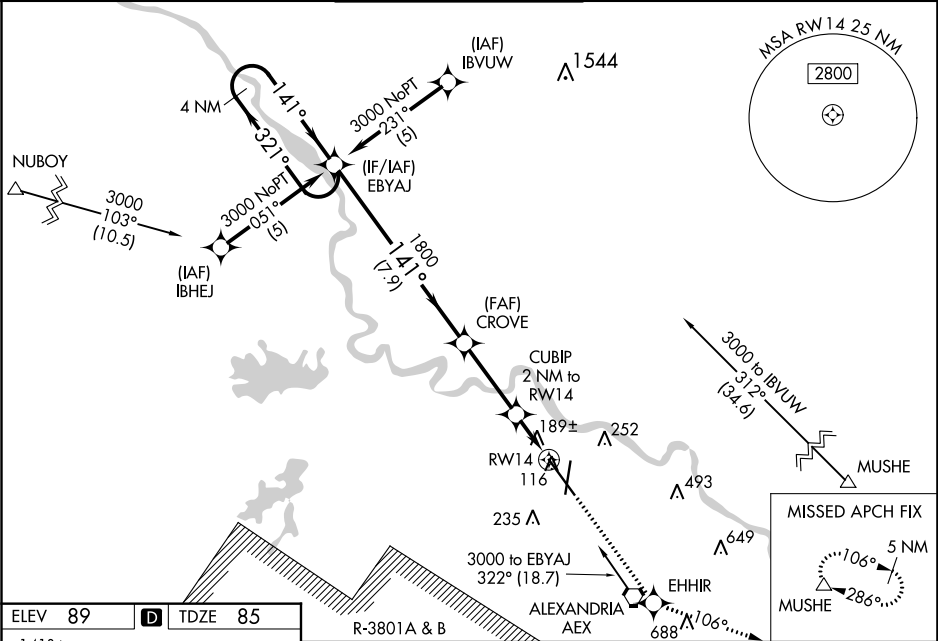

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70). 4 NM Holding Pattern EBYAJ				
GP 3.00° TCH 56				
3000 ← 321° → 141° → 141° → 1800 → 780 → RWY 14				
7.9 NM 3.1 NM 1 NM 1 NM				
CATEGORY	A	B	C	D
LPV DA**	285/24		200 (200-½)	
LNAV/VNAV DA	488/50		403 (400-1)	
LNAV MDA	480/24		395 (400-½)	
CIRCLING	540-1 451 (500-1)	560-1 471 (500-1)	560-1½ 471 (500-1½)	640-2 551 (600-2)

SC-4, 31 DEC 2020 to 28 JAN 2021

SC-4, 31 DEC 2020 to 28 JAN 2021