RNAV (GPS) RWY 14

SHREVEPORT RGNL (SHV)

WAAS	APP CRS	Rwy Idg	7976
CH 45913	141°	TDZE	258
W14A		Apt Elev	258

RNP APCH.

ASR

For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 3000 direct COBAV and hold.

ATIS	SHREVEPORT APP CON	SHREVEPORT TOWER	GND CON	CLNC DEL
128.45	119.9 335.55	121.4 236.775	121.175 236.775	124.65

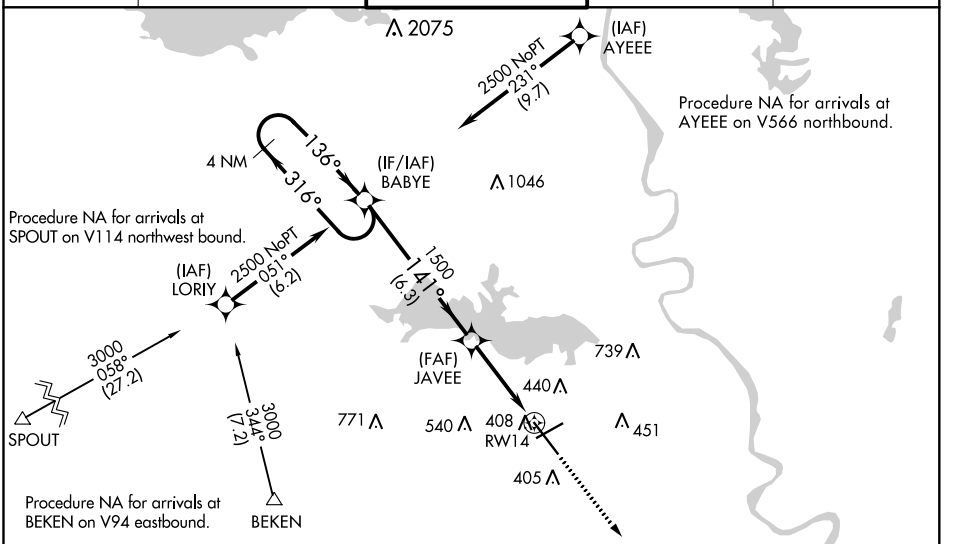

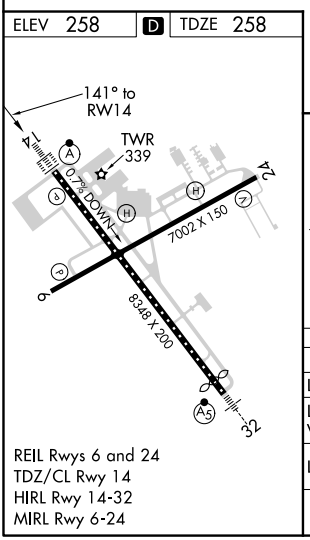

REIL Rwys 6 and 24
TDZ/CL Rwy 14
HIRL Rwy 14-32
MIRL Rwy 6-24

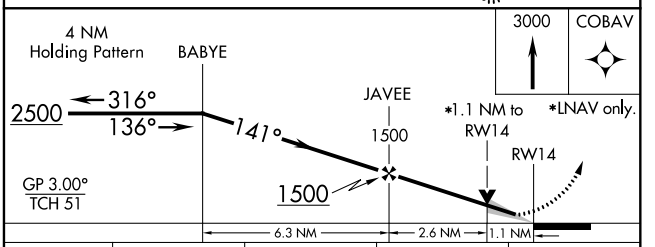

CATEGORY	A	B	C	D
LPV DA	458/18 200 (200-½)			
LNAV/VNAV DA	640/40 382 (400-¾)			
LNAV MDA	660/24 402 (500-½)		660/40 402 (500-¾)	
C CIRCLING	760-1 502 (600-1)		980-2 722 (800-2)	1100-2¾ 842 (900-2¾)

SC-4, 31 DEC 2020 to 28 JAN 2021
SC-4, 31 DEC 2020 to 28 JAN 2021