BLTWY SIX DEPARTURE (RNAV)

ASOS
119.275
CLNC DEL (When twr closed)
135.35
GND CON
118.625
GALVESTON TOWER ★
120.575 (CTAF)
HOUSTON DEP CON
134.45 284.0

TOP ALTITUDE: ASSIGNED BY ATC

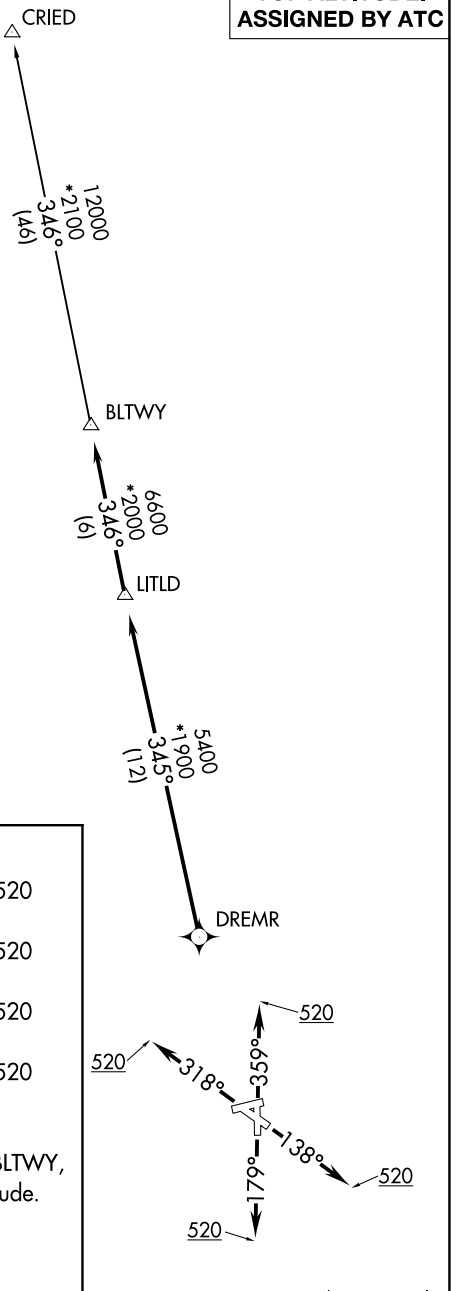

NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

TAKEOFF MINIMUMS
Rwys 14, 18, 32, 36:
Standard with minimum climb of 500′ per NM to 520.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Climb on heading 138° to 520 for RADAR vectors to DREMR, thence . . . .
TAKEOFF RWY 18: Climb on heading 179° to 520 for RADAR vectors to DREMR, thence . . . .
TAKEOFF RWY 32: Climb on heading 318° to 520 for RADAR vectors to DREMR, thence . . . .
TAKEOFF RWY 36: Climb on heading 359° to 520 for RADAR vectors to DREMR, thence . . . .

...on track 345° to LITLD, then on track 346° to BLTWY, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

CRIED TRANSITION (BLTWY6.CRIED)

NOTE: Chart not to scale.

SC-5, 31 DEC 2020 to 28 JAN 2021
SC-5, 31 DEC 2020 to 28 JAN 2021