

(BLTWY6.BLTWY) 19115
BLTWY SIX DEPARTURE (RNAV)

AL-5757 (FAA)


BAYTOWN (HPY)
BAYTOWN, TEXAS

CTAF
122.8
HOUSTON DEP CON
134.45 284.0

TOP ALTITUDE:
ASSIGNED BY ATC

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

TAKEOFF MINIMUMS
Rwy 14, 32: Standard with minimum climb
of 500' per NM to 540.

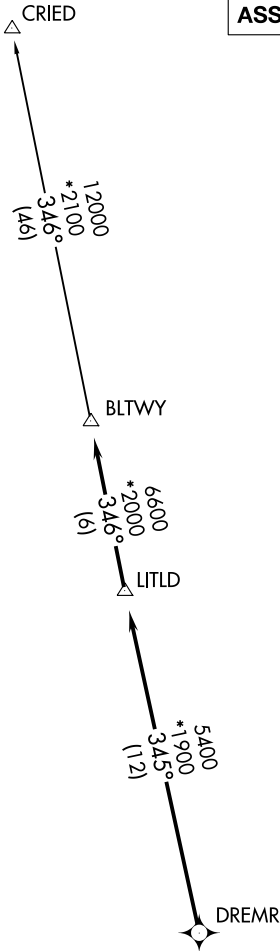

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 14: Climb heading 140° to 540 for RADAR vectors to DREMR, then . . .

TAKEOFF RWY 32: Climb heading 320° to 540 for RADAR vectors to DREMR, then . . .

...on track 345° to LITLD, then on track 346° to BLTWY, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

CRIED TRANSITION (BLTWY6.CRIED)

NOTE: Chart not to scale.

BLTWY SIX DEPARTURE (RNAV)
(BLTWY6.BLTWY) 25APR19

BAYTOWN, TEXAS
BAYTOWN (HPY)

SC-5, 31 DEC 2020 to 28 JAN 2021

SC-5, 31 DEC 2020 to 28 JAN 2021