

APP CRS	Rwy Idg	7800
170°	TDZE	499
	Apt Elev	501

RNAV (RNP) Z RWY 17L
LOUISVILLE MUHAMMAD ALI INTL (SDF)

RNP AR APCH.

T For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1% SM. Simultaneous approach authorized, except for arrivals at CHUWE, KAEDN, ALANB, and COBLR.

MALSR



MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct IIIU VORTAC and hold, continue climb-in-hold to 3000.

D-ATIS
118.725


LOUISVILLE APP CON
132.075 327.0

LOUISVILLE TOWER
124.2 257.8

GND CON
121.7 348.6

CLNC DEL
126.1 275.8

CPDLC

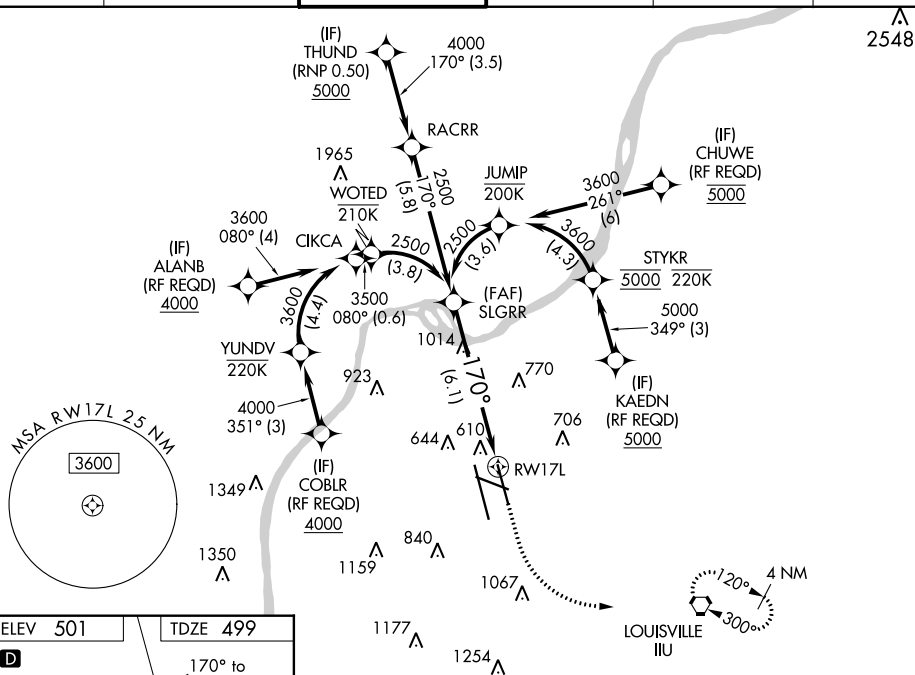


ELEV 50

TDZE 499

D

170° to
RW17L

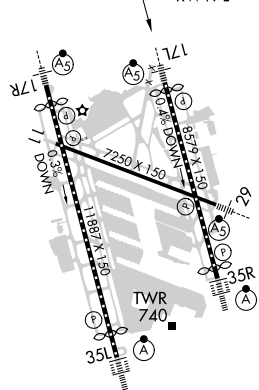

HIRL all Rwys
TDZ/CL Rwys 17L, 17R, 35L and 35R

LOUISVILLE, KENTUCKY
Orig-F 15AUG19

LOUISVILLE MUHAMMAD ALI INTL (SDF)
RNAV (RNP) Z RWY 17L

38°10'N-85°44'W

SE-1, 31 DEC 2020 to 28 JAN 2021