

D-ATIS DEP 135.3
CLNC DEL
127.175
CINCINNATI TOWER
118.3 (RWYS 18C/36C, 9/27)
118.975 360.85 (RWY 18L/36R)
133.325 (RWY 18R/36L)
GND CON
121.7
CINCINNATI DEP CON
126.65 254.25 (001°-180°)
128.7 254.25 (181°-360°)

NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: DME/DME/IRU or GPS Required.
NOTE: Radar required.
NOTE: RNAV 1.
NOTE: Accelerate to 250 KIAS, if unable, advise ATC.
NOTE: Transponder code will be issued via PDC or Cincinnati CLNC DEL.

JBNCH

TAKEOFF MINIMUMS:


Rwy 9: NA-ATC.
Rwys 18L, 18C, 18R, 27, 36R, 36C, 36L:
Standard with minimum climb of 500' per NM until 1400.

ROSEWOOD
ROD
FL180
*2600
049°
(23)
DAYTON
DQN

HAGOL
17900
*2600
023°
(28)

BNGLE

TOP ALTITUDE:
(JETS/PROPS)
6000 4000

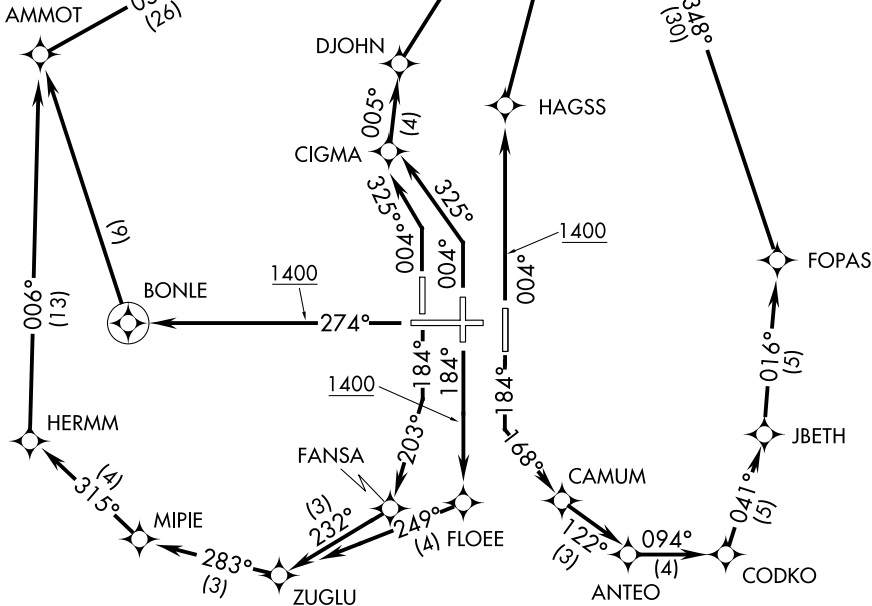

NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)

SE-1, 31 DEC 2020 to 28 JAN 2021

SE-1, 31 DEC 2020 to 28 JAN 2021