RNAV (RNP) Z RWY 18R

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

APP CRS	Rwy ldg	8000
184°	TDZE	868
	Apt Elev	896

For inoperative ALSF, increase RNP 0.29 visibility to RVR 6000, RNP 0.30 visibility to 1½. For uncompensated Baro-VNAV systems, procedure NA below -16° C (4° F) or above 47° C (116° F). GPS required. Simultaneous approach authorized with Rwy 18C/L. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

NA

ALSF-2

MISSED APPROACH: Climb to 3000 via 184° track to BEPEE and via 266° track to AVIEW and hold.

D-ATIS ARR	D-ATIS DEP	CINCINNATI APP CON	CINCINNATI TOWER	GND CON	CLNC DEL
134.375	135.3	119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	118.975 360.85 (RWY 18L/36R) 118.3 (RWYS 18C/36C, 09/27) 133.325 (RWY 18R/36L)	121.7	127.175

RADAR REQUIRED

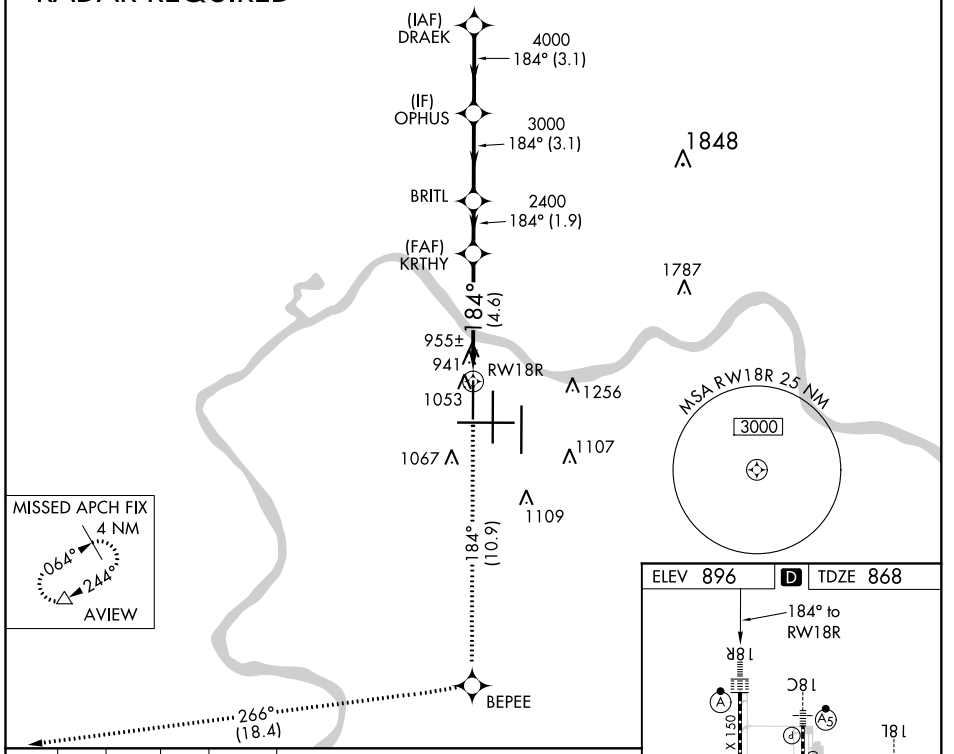

3000 ↑	tr 184°	BEPEE	tr 266°	AVIEW

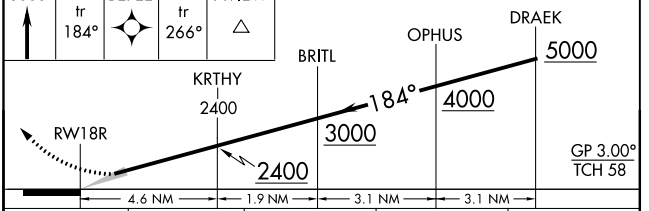

CATEGORY	A	B	C	D
RNP 0.29 DA	1243/40 375 (400-¾)			
RNP 0.30 DA	1281/50 413 (400-1)			

AUTHORIZATION REQUIRED

ELEV 896 D TDZE 868

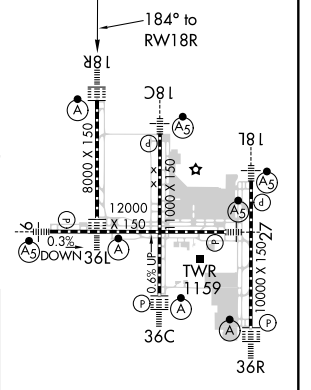

HIRL all Rwys
TDZ/CL all Rwys except 27

SE-1, 31 DEC 2020 to 28 JAN 2021

SE-1, 31 DEC 2020 to 28 JAN 2021