

LOC I-ILM

110.3

APP CRS

349°

Rwy Idg

7204

TDZE

31

Apt Elev

32

ILS Y or LOC RWY 35


WILMINGTON INTL (ILM)

ADF required. RADAR required for procedure entry.

MALSR

MISSED APPROACH: Climb to 600 then climbing left turn to 1800 direct AIRLI LOM and hold.

ATIS	WILMINGTON APP CON ★	WILMINGTON TOWER ★	GND CON	UNICOM
124.975	118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	119.9 (CTAF) 0 239.3	121.9 348.6	122.95

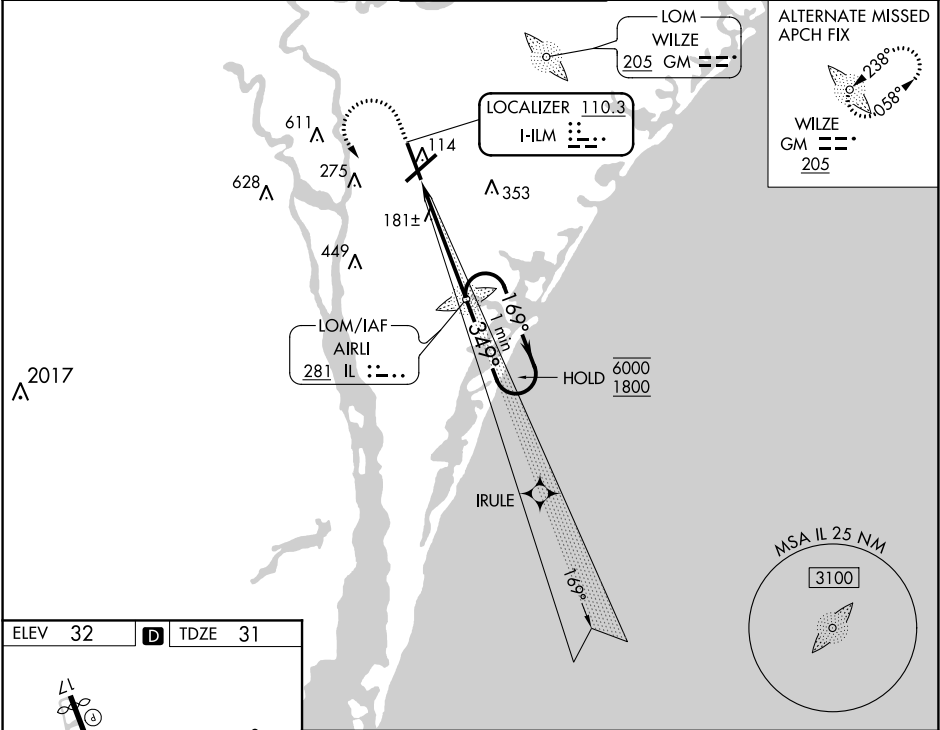

ELEV 32

D

TDZE 31

HIRL Rwy 17-35

HIRL Rwy 6-24

REIL Rwy 17

REIL Rwy 6

FAF to MAP 4.7 NM

Knots

60

90

120

150

180

Min:Sec

4:38

3:06

2:19

1:51

1:33

	600	1800	IL	
				IL LOM 1576
				One Minute Holding Pattern
				169° → 6000
				← 349° 1800
				GS 3.00°
				TCH 37
				4.7 NM
CATEGORY	A	B	C	D
S-ILS 35	242/24 211 (300-½)			
S-LOC 35	500/24 469 (500-½)		500/50 469 (500-1)	
CIRCLING	560-1 528 (600-1)		720-2 688 (700-2)	
			920-3 888 (900-3)	