RALEIGH NINE DEPARTURE

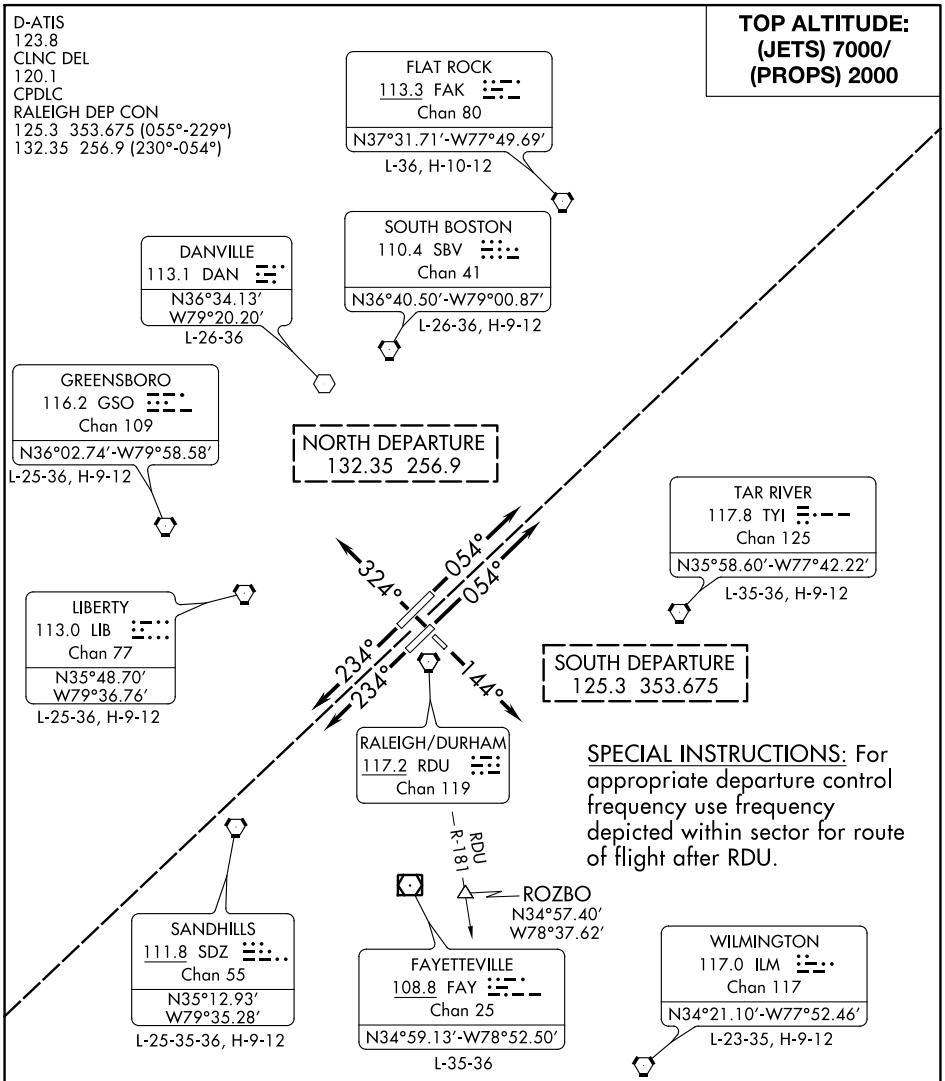

SPECIAL INSTRUCTIONS: For appropriate departure control frequency use frequency depicted within sector for route of flight after RDU.

NOTE: RADAR required.
NOTE: ROZBO departures expect RADAR vectors to RDU R-181.

TAKEOFF MINIMUMS

Rwys 5L/R: Standard.
Rwy 23L: Standard with a minimum climb of 250′ per NM to 2700.
Rwy 23R: Standard with a minimum climb of 240′ per NM to 2700.
Rwy 14: Standard with a minimum climb of 310′ per NM to 1500.
Rwy 32: 300-1.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-2, 31 DEC 2020 to 28 JAN 2021