RNAV (GPS) RWY 7

AIKEN RGNL (AIK)

WAAS	APP CRS		
CH **90301**	**066°**	Rwy Idg	**5500**
W07A		TDZE	**515**
		Apt Elev	**529**

T NA Baro-VNAV NA when using Augusta Rgnl at Bush Field altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. VDP NA with Augusta Rgnl at Bush Field altimeter setting. When local altimeter setting not received, use Augusta Rgnl at Bush Field altimeter setting: increase LPV all Cats DA to 819 feet, LNAV/VNAV all Cats DA to 890 feet, LPV all Cats visibility ¼ mile and LNAV/VNAV all Cats ⅜ mile; increase all MDA 120 feet and LNAV Cat C/D visibility ⅜ mile and Circling Cat D ¼ mile.

MISSED APPROACH: Climb to 2500 direct OXAXE and hold.

AWOS-3	AUGUSTA APP CON ★	CLNC DEL	UNICOM
118.025	**119.15 284.625**	**126.075**	**122.8** (CTAF) L

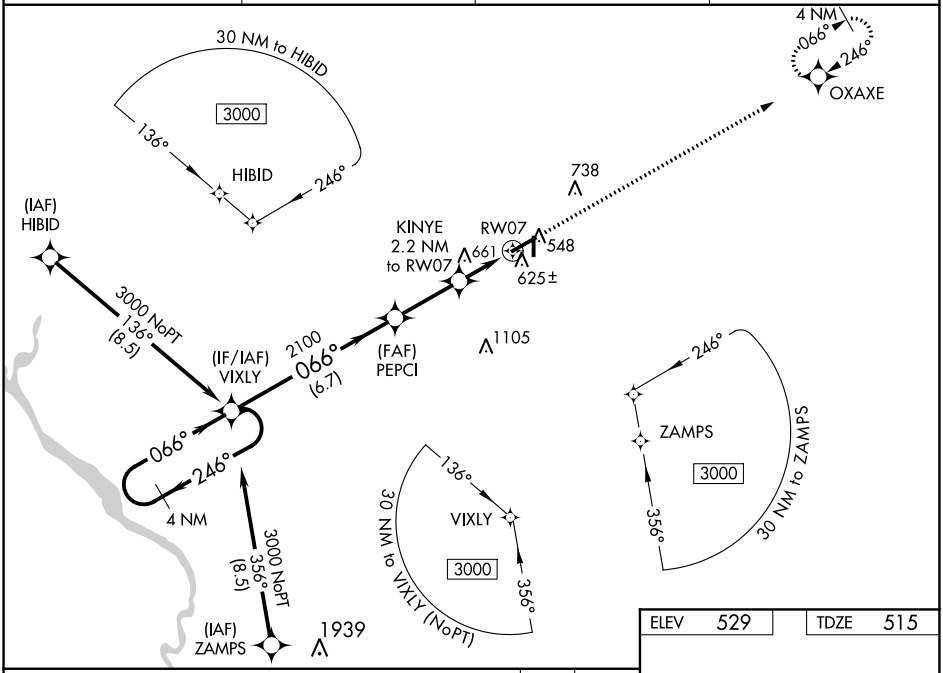

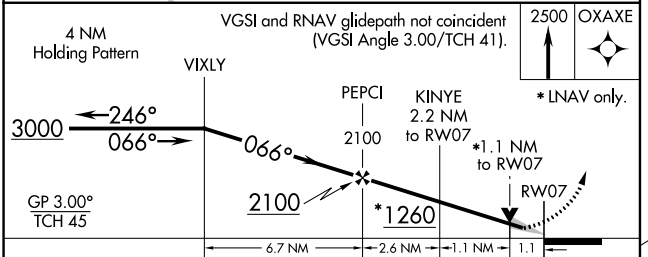

CATEGORY	A	B	C	D
LPV DA	715-¾ 200 (200-¾)			
LNAV/VNAV DA	786-⅞ 271 (300-⅞)			
LNAV MDA	920-1 405 (400-1)		920-1⅛ 405 (400-1⅛)	
CIRCLING	980-1 451 (500-1)	1000-1 471 (500-1)	1000-1½ 471 (500-1½)	1080-2 551 (600-2)

ELEV 529 TDZE 515



REIL Rwy 25
MIRL Rwy 7-25 L

SE-2, 31 DEC 2020 to 28 JAN 2021
SE-2, 31 DEC 2020 to 28 JAN 2021