

WAAS CH 53305 W09A	APP CRS 094°	Rwy ldg TDZE Apt Elev 5350 19 19
--	------------------------	--



RNAV (GPS) RWY 9

CHARLESTON EXECUTIVE (JZI)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Baro-VNAV and VDP NA when using Charleston AFB/Intl altimeter setting. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase all DA 32 feet and all MDA 40 feet; increase LNAV Cat C and D visibility ½ mile.

MISSED APPROACH:
Climb to 2100 direct
GEGDE and hold.

AWOS-3 123.775	CHARLESTON APP CON 120.7 306.925	CLNC DEL 119.85	UNICOM 122.8 (CTAF) 1
--------------------------	--	---------------------------	---------------------------------

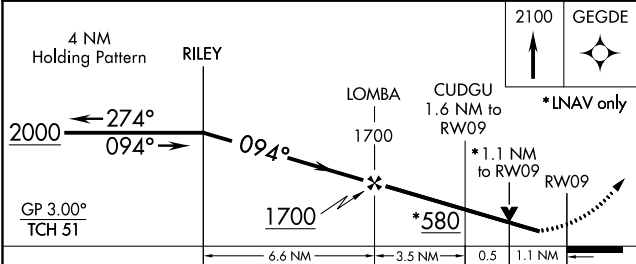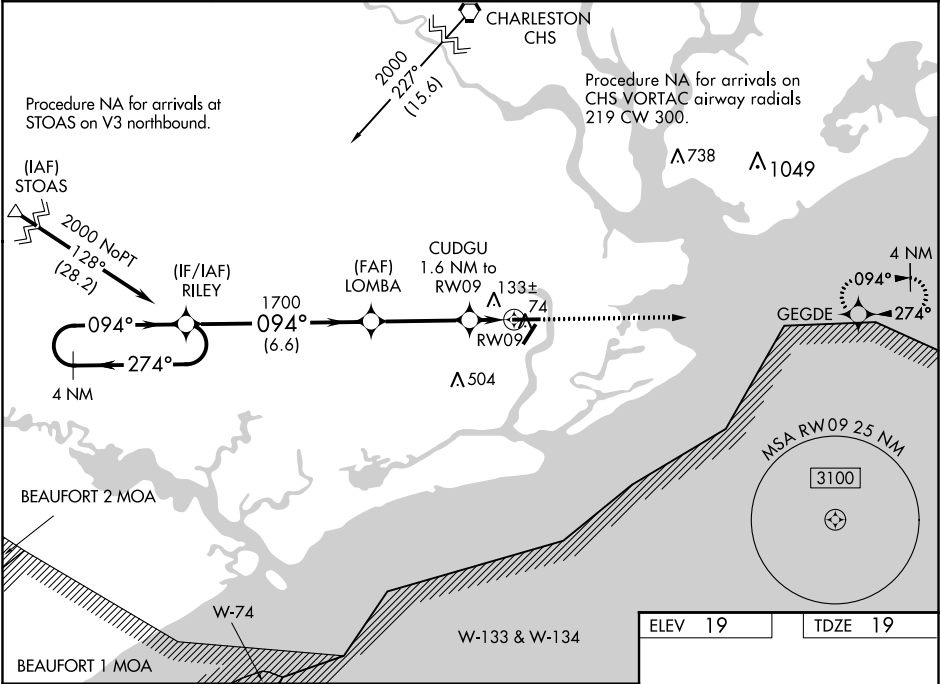

CATEGORY	A	B	C	D
LPV DA		219-¾	200 (200-¾)	
LNAV/VNAV DA		314-1	295 (300-1)	
LNAV MDA	400-1	381 (400-1)	400-1½	381 (400-1½)
CIRCLING	440-1 421 (500-1)	480-1 461 (500-1)	480-1½ 461 (500-1½)	580-2 561 (600-2)

