WAAS CH 82620 W24A	APP CRS 240°	Rwy Idg 5002 / TDZE 144 / Apt Elev 144

RNAV (GPS) Z RWY 24

CLINTON-SAMPSON COUNTY (CTZ)

Baro-VNAV NA when using Kenansville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 46°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Kenansville altimeter setting and increase all DA 45 feet, increase LNAV/VNAV Cats A/B/C visibility ⅛ mile. Rwy 24 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 24 NA at night, Circling Rwy 24 NA at night.

MISSED APPROACH: Climb to 2500 direct WEXES and hold.

AWOS-3	FAYETTEVILLE APP CON	UNICOM
119.125	133.0 290.25	122.8 (CTAF) L

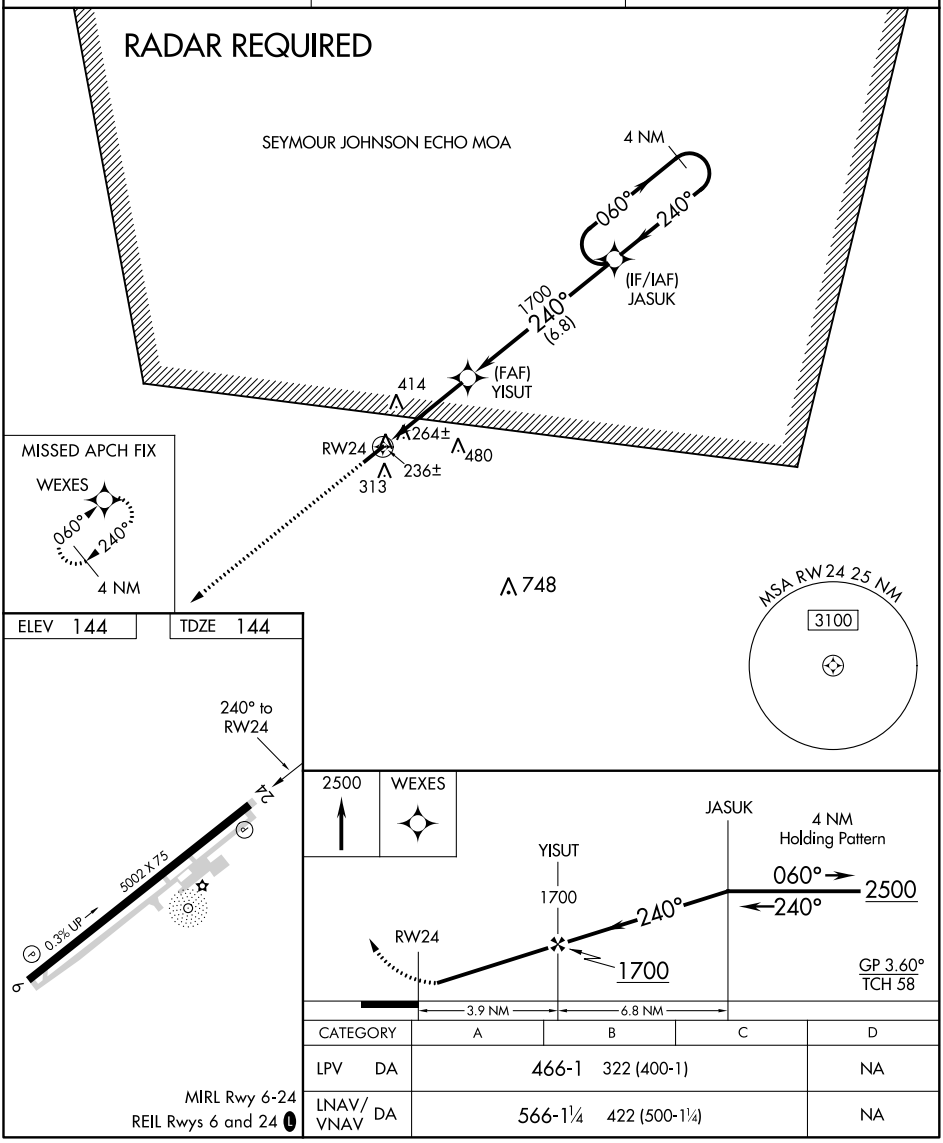

CATEGORY	A	B	C	D
LPV DA	466-1	322 (400-1)		NA
LNAV/VNAV DA	566-1¼	422 (500-1¼)		NA

MIRL Rwy 6-24
REIL Rwys 6 and 24 L

SE-2, 31 DEC 2020 to 28 JAN 2021
SE-2, 31 DEC 2020 to 28 JAN 2021