WAAS	APP CRS	Rwy Idg	4008
CH 63031	141°	TDZE	41
W14A		Apt Elev	41

RNAV (GPS) RWY 14

JACKSONVILLE EXECUTIVE AT CRAIG (CRG)

Procedure NA at night. Baro-VNAV NA when using Jacksonville Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Jacksonville Intl altimeter setting and increase all DA 32 feet and all MDA 40 feet. Increase LNAV/VNAV all Cats visibility to 1⅜ and LNAV Cat D visibility to 1½.

MISSED APPROACH: Climb to 1900 direct JEVAG and hold.

ATIS	JACKSONVILLE APP CON	CRAIG TOWER ★	GND CON	CLNC DEL	UNICOM
125.4	124.9 308.4	132.1 (CTAF) L 269.525	121.8	118.35	122.95

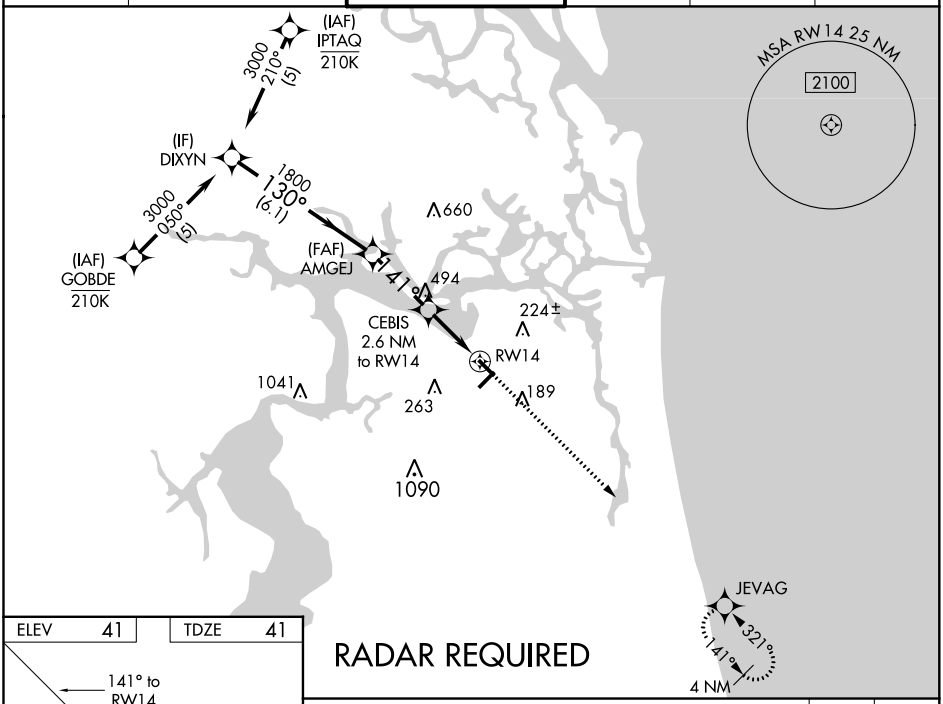

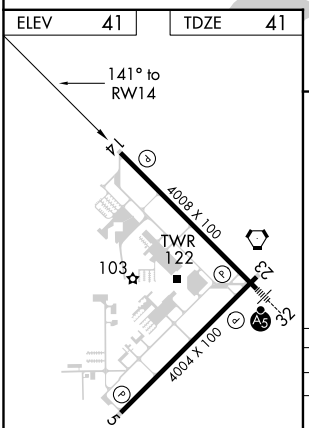

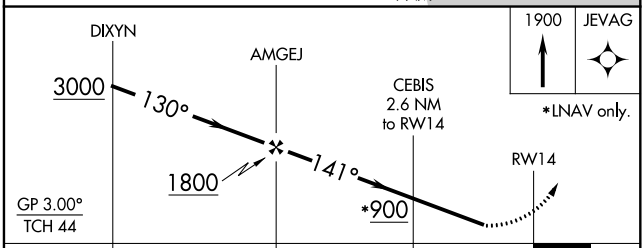

CATEGORY	A	B	C	D
LPV DA	293-1 252 (300-1)			
LNAV/VNAV DA	418-1¼ 377 (400-1¼)			
LNAV MDA	500-1 459 (500-1)		500-1⅜ 459 (500-1⅜)	
CIRCLING	500-1 459 (500-2)	580-1 539 (600-2)	580-1½ 539 (600-1½)	600-2 559 (600-2)

SE-3, 31 DEC 2020 to 28 JAN 2021
SE-3, 31 DEC 2020 to 28 JAN 2021