
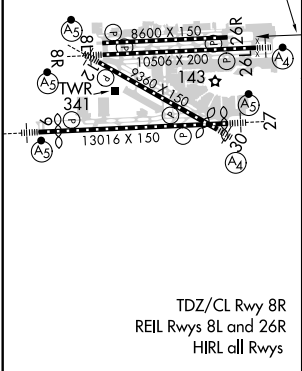


LOC/DME I-CNV	APP CRS	Rwy Idg	8600
<b>109.3</b>	<b>272°</b>	TDZE	<b>8</b>
Chan <b>30</b>		Apt Elev	<b>9</b>

LOC/DME RWY 26R  
MIAMI INTL (MIA)

D-ATIS		MIAMI APP CON	MIAMI TOWER	GND CON		CLNC DEL	CPDLC
ARR	<b>119.15</b>	<b>124.85</b>	<b>118.3</b>	<b>121.8</b>	(8L/8R/12/26L/26R)	<b>348.6</b>	
DEP	<b>133.675</b>	<b>322.3</b>	<b>256.9</b>	<b>127.5</b>	(9/27/30)	<b>135.35</b>	

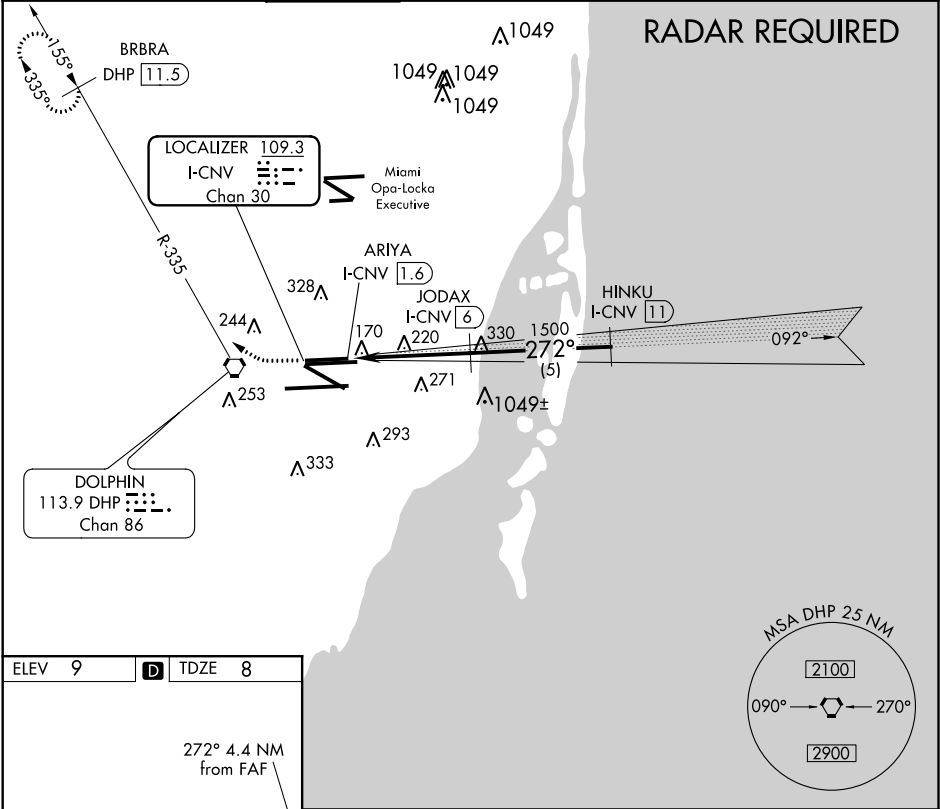

ELEV	9	D	TDZE	8
* 1500 when directed by ATC.				
CATEGORY	A	B	C	D
S-26R	480-1	472 (500-1)	480-1 1/4 472 (500-1 1/4)	480-1 1/2 472 (500-1 1/2)
CIRCLING	NA			