MNATE TWO DEPARTURE(RNAV)

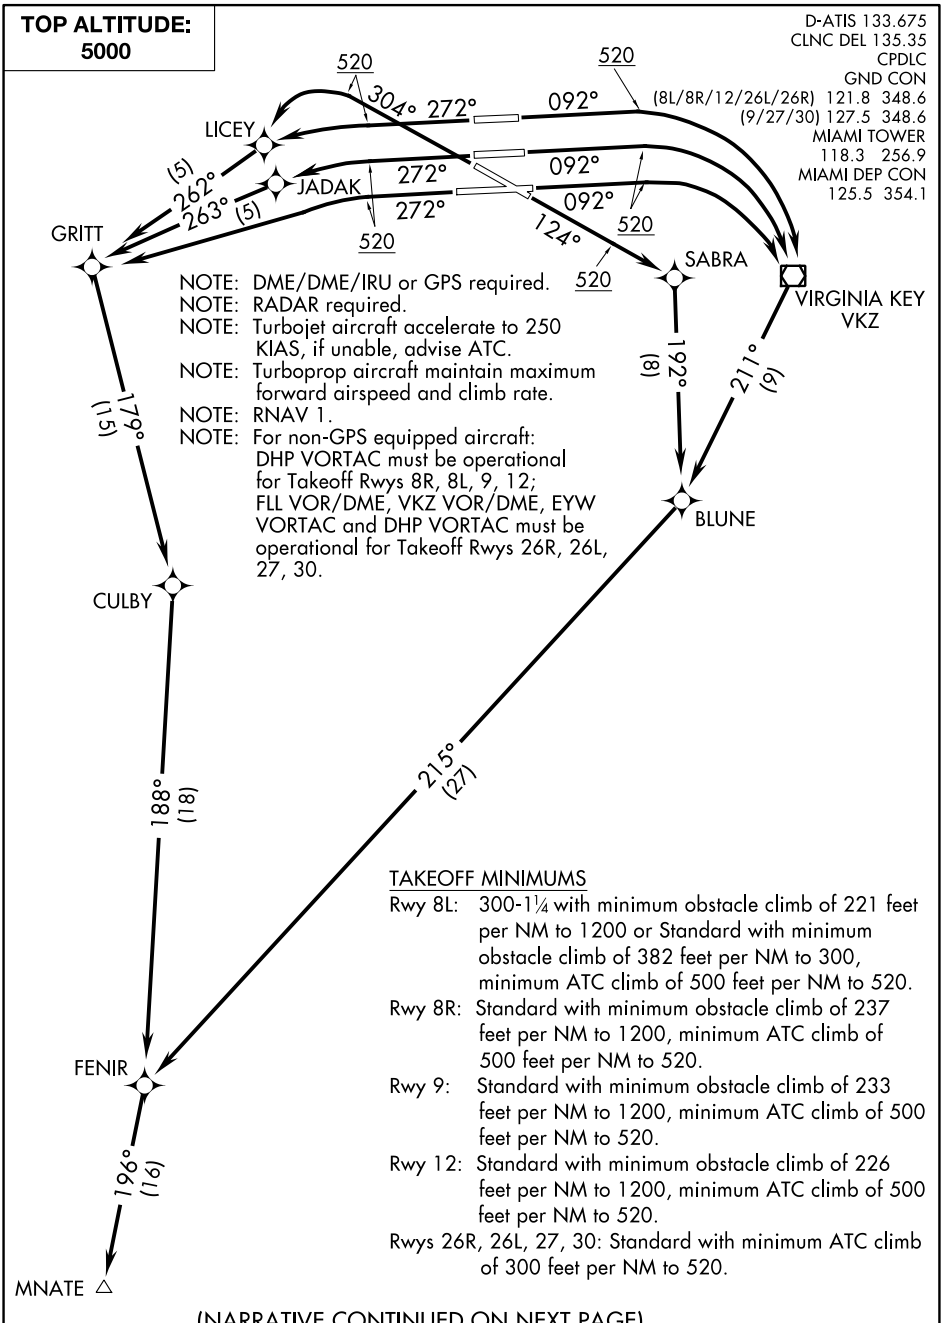

TAKEOFF MINIMUMS

Rwy 8L: 300-1¼ with minimum obstacle climb of 221 feet per NM to 1200 or Standard with minimum obstacle climb of 382 feet per NM to 300, minimum ATC climb of 500 feet per NM to 520.

Rwy 8R: Standard with minimum obstacle climb of 237 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.

Rwy 9: Standard with minimum obstacle climb of 233 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.

Rwy 12: Standard with minimum obstacle climb of 226 feet per NM to 1200, minimum ATC climb of 500 feet per NM to 520.

Rwys 26R, 26L, 27, 30: Standard with minimum ATC climb of 300 feet per NM to 520.

(NARRATIVE CONTINUED ON NEXT PAGE)

NOTE: Chart not to scale.

SE-3, 31 DEC 2020 to 28 JAN 2021