VALPARAISO, FLORIDA

HI-ILS or LOC RWY 30

LOC I-VPS	APCH CRS	Rwy ldg	11,987
109.1	300°	THRE	49
		Arpt Elev	84

JAL-436 [USAF] EGLIN AFB/DESTIN-FT WALTON BEACH (KVPS)

*When ALS inop, increase CAT CDE RVR to 40 and vis to ¾ mile.

**When ALS inop, increase CAT CDE RVR to 60 and vis to 1⅛ miles.

ALSF-1

†MISSED APPROACH: Climb straight ahead to 600 then climbing left turn to 2200 direct TUFER/12 DME and hold.

ATIS *	EGLIN APP CON	EGLIN TOWER	GND CON	CLNC DEL
134.625 273.5	125.1 281.45 271°- 089° 132.1 360.6 090°- 270°	118.2 353.65	121.8 335.8	127.7 377.2

Aircraft holding in excess of 230 KIAS require RADAR monitoring.

Procedure not usable at times due to restricted area activity.

†Missed approach requires use of RNAV or ATC RADAR monitoring.



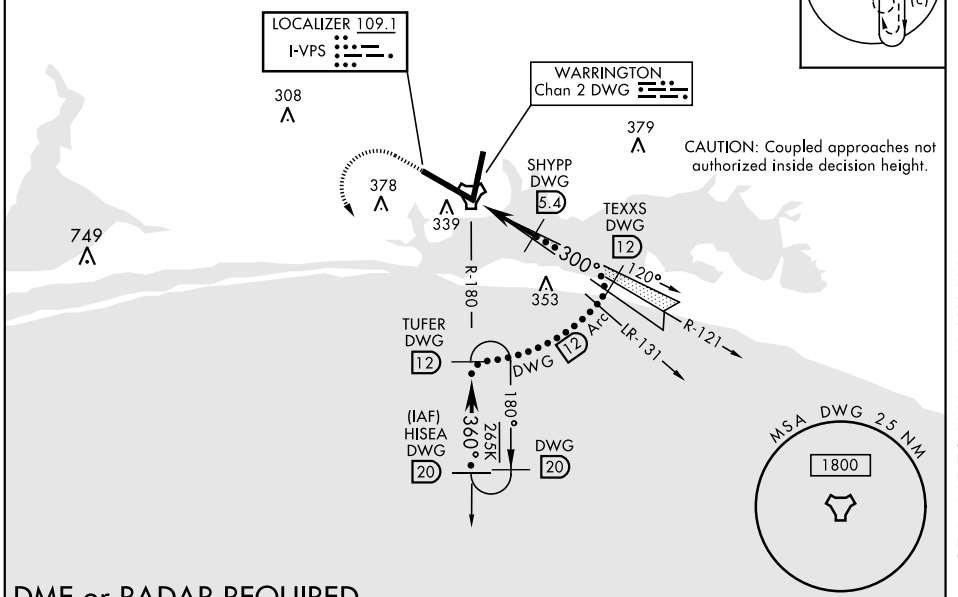

DME or RADAR REQUIRED

(For LOC approach)

EMERG SAFE ALT 100 NM 3600

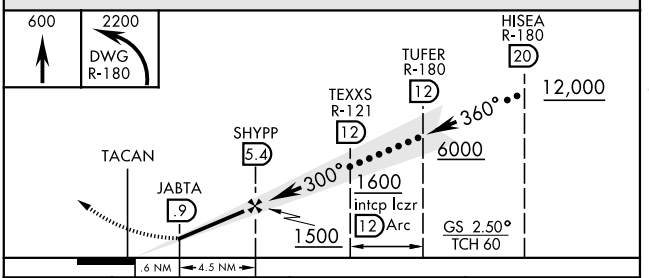

CATEGORY	C	D	E
S-ILS 30*	249/24 200 (200-½)		
S-LOC 30**	440/35 391 (400-⅝)		
CIRCLING	760-2 676 (700-2)	760-2¼ 676 (700-2¼)	760-2½ 676 (700-2½)

ELEV 84 | THRE 49



HIRL all Rwy

††Rwy 19 apch lgt 1500' nonstandard.

LOC FAF to MAP 4.5 NM					
Knots	120	140	160	180	200
Min:Sec	2:15	1:56	1:41	1:30	1:21