RNAV (GPS) RWY 5

LAKELAND LINDER INTL (LAL)

WAAS	APP CRS	Rwy Idg	5000
CH 42805	049°	TDZE	136
W05A		Apt Elev	142

RNP APCH.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Plant City altimeter setting and increase all DA/MDA 20 feet and LNAV Cat C/D visibility ⅛ SM. Baro-VNAV and VDP NA when using Plant City altimeter setting. Circling NA to Rwys 8, 26.

MISSED APPROACH: Climb to 2000 direct OBTOQ and left turn on track 311° to PLUMY and hold.

ATIS	TAMPA APP CON	LAKELAND TOWER	GND CON
118.025	120.65 290.3	124.5 (CTAF) L 236.775	121.4

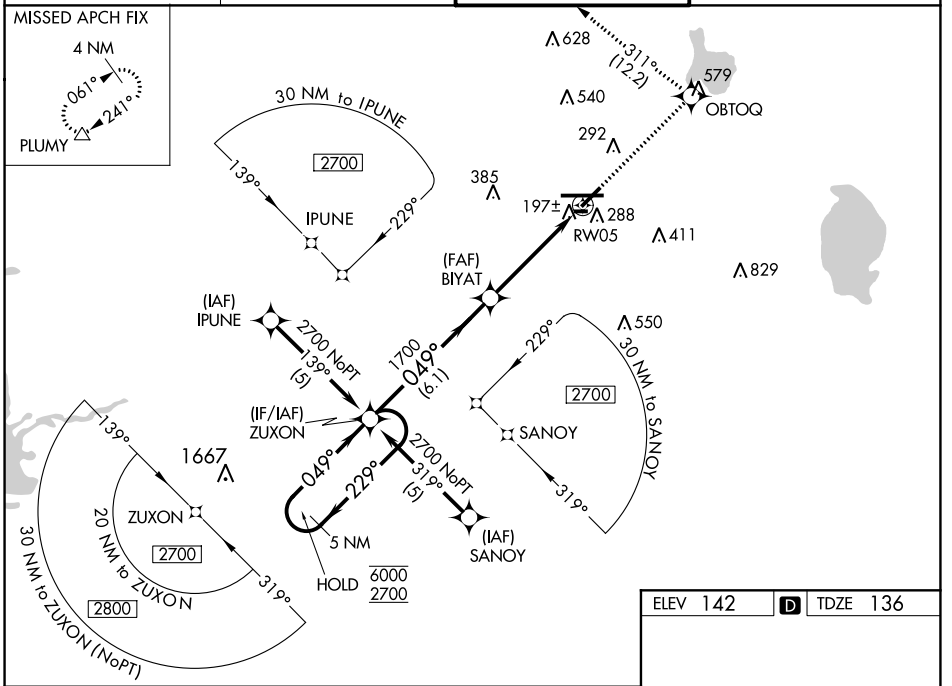

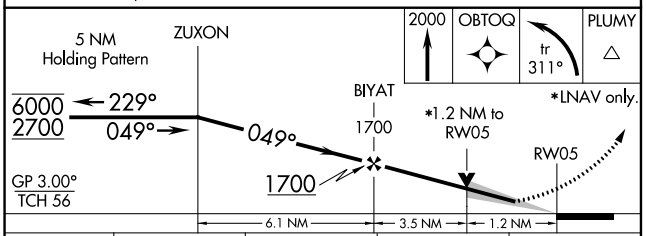

CATEGORY	A	B	C	D
LPV DA	336-¾ 200 (200-¾)			
LNAV/VNAV DA	505-1¼ 369 (400-1¼)			
LNAV MDA	560-1 424 (500-1)		560-1¼ 424 (500-1¼)	
CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	660-1½ 518 (600-1½)	700-2 558 (600-2)

ELEV 142 D TDZE 136

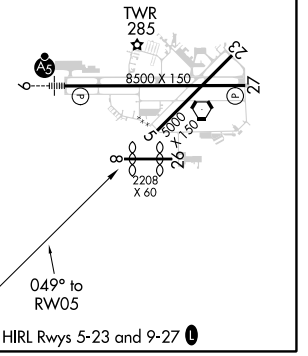

HIRL Rwys 5-23 and 9-27 L

SE-3, 31 DEC 2020 to 28 JAN 2021
SE-3, 31 DEC 2020 to 28 JAN 2021