


WAAS CH <b>58110</b> <b>W36A</b>	APP CRS <b>004°</b>	Rwy Idg TDZE Apt Elev	<b>6347</b> <b>80</b> <b>89</b>
--	------------------------	-----------------------------	---------------------------------------


**RNAV (GPS) RWY 36**  
OCALA INTL-JIM TAYLOR FIELD (OCF)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Gainesville altimeter setting and increase LPV DA to 361, LNAV/VNAV DA to 644, and all MDA 100 feet; increase LNAV/VNAV all Cats, and LNAV Cats C and D visibility ¼ mile. VDP and Baro-VNAV NA when using Gainesville altimeter setting. Inoperative table does not apply to LPV when using local altimeter setting. For inoperative MALS, increase LNAV Cats A and B visibility to 1 mile. For inoperative MALS, increase LNAV Cats A and B visibility to 1 mile.

**MALS**  


**MISSED APPROACH:**  
Climb to 2100 direct CUFJO and hold.

ATIS <b>128.125</b>	JACKSONVILLE APP CON <b>118.6 251.15</b>	OCALA TOWER ★ <b>119.25</b> (CTAF) 	GND CON <b>121.4</b>	UNICOM <b>123.0</b>
------------------------	---	---	-------------------------	------------------------

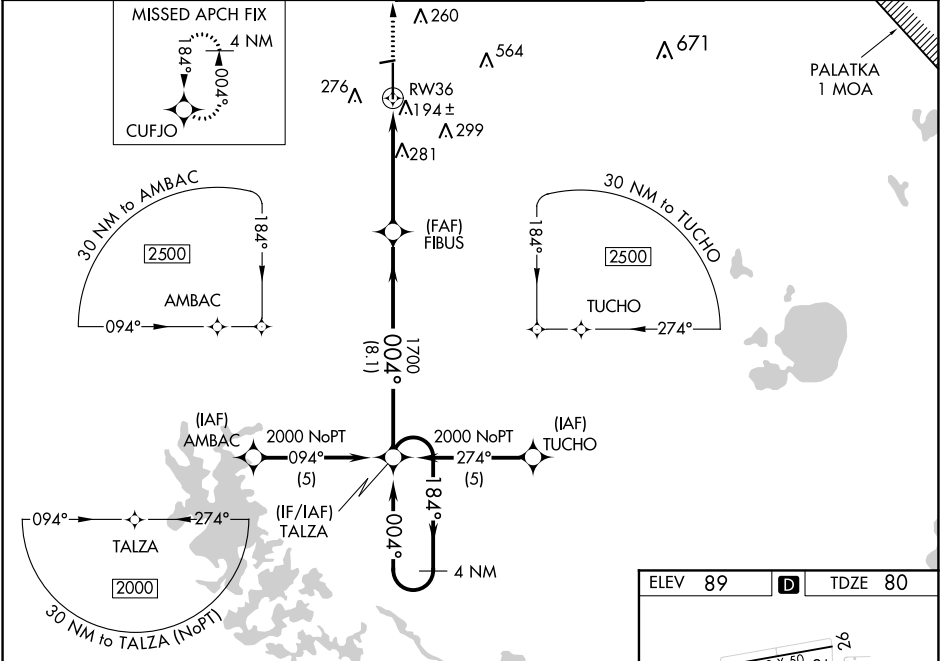

4 NM Holding Pattern  
TALZA  
2000  
184°  
004°  
GP 3.00°  
TCH 50

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).

2100 CUFJO


\*LNAV only.


\*1.4 NM to RW36


RW36

8.1 NM 3.5 NM 1.4 NM

CATEGORY	A	B	C	D
LPV DA	280-¾ 200 (200-¾)			
LNAV/VNAV DA	563-1¼ 483 (500-1¼)			
LNAV MDA	540-¾ 460 (500-¾)			540-1 460 (500-1)
CIRCLING	580-1 491 (500-1)		580-1½ 491 (500-1½)	640-2 551 (600-2)

HIRL Rwy 18-36 

ELEV 89  TDZE 80

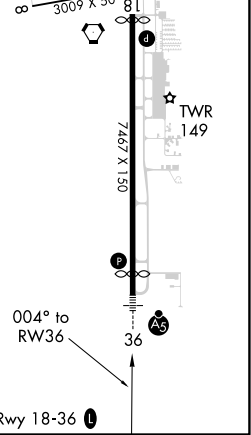

3009 X 50  
81  
7467 X 150  
TWR 149  
36  
004° to RW36