


WAAS CH 56206 W17A	APP CRS 175°	Rwy Idg 8006 TDZE 213 Apt Elev 214
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 17

BOB SIKES (CEW)

RNP APCH.	<p>⚠ Circling NA for Cat D west of Rwy 17-35. Baro-VNAV and VDP NA when using EGLIN AFB altimeter setting. When local altimeter setting not received, use Eglin AFB altimeter setting and increase LPV DA to 529, LNAV/VNAV DA to 699 and all MDA 60 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.</p>	MISSED APPROACH: Climb to 2000 direct HEKLU and hold.
-----------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------

ASOS 119.275	EGLIN APP CON 124.05 284.65	UNICOM 122.95 (CTAF) 0
------------------------	---------------------------------------	----------------------------------

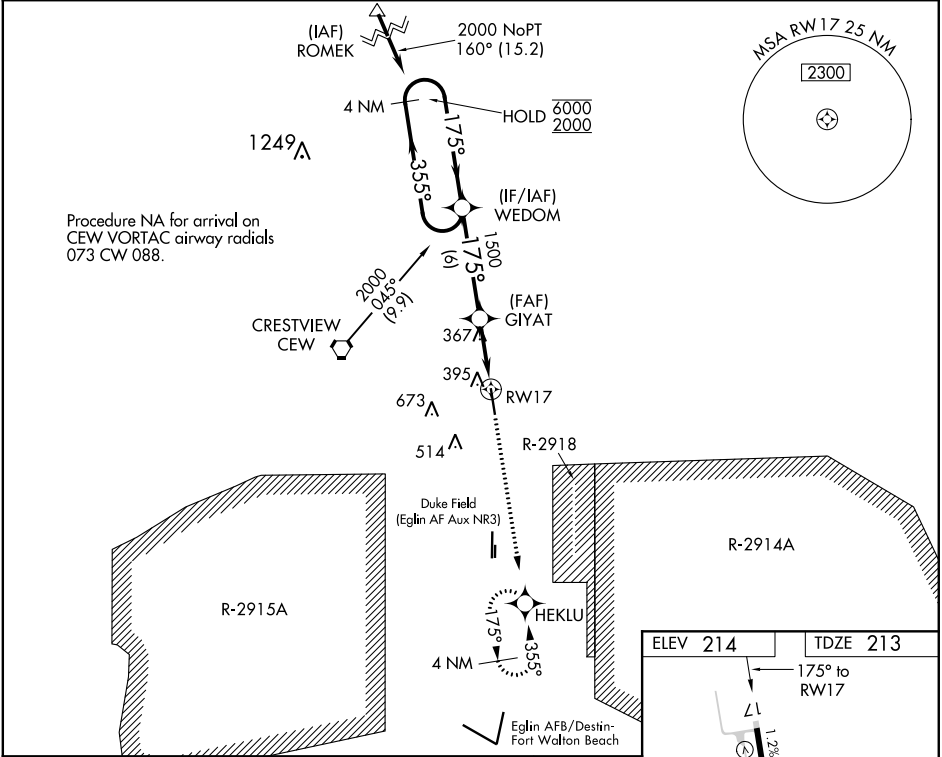

4 NM Holding Pattern				
<div>GP 3.00° TCH 51</div> <div>6000 ← 355° 2000 → 175°</div> <div>WEDOM GIYAT</div> <div>1500 1500</div> <div>6 NM 2.6 NM 1.2 NM</div> <div>*1.2 NM to RW17</div> <div>*LNAV only.</div>				
CATEGORY	A	B	C	D
LPV DA	470-1 257 (300-1)			
LNAV/VNAV DA	640-1½ 427 (500-1½)			
LNAV MDA	660-1 447 (500-1)	660-1¼ 447 (500-1¼)	660-1½ 447 (500-1½)	
CIRCLING	700-1 486 (500-1)	820-1¾ 606 (700-1¾)	840-2 626 (700-2)	

