


AWOS-3
119.275
CLNC DEL
118.25
TAMPA DEP CON
119.65 353.575

TAKEOFF MINIMUMS
Rwys 5, 13, 23, 31: Standard with minimum
climb of 500' per NM to 540.

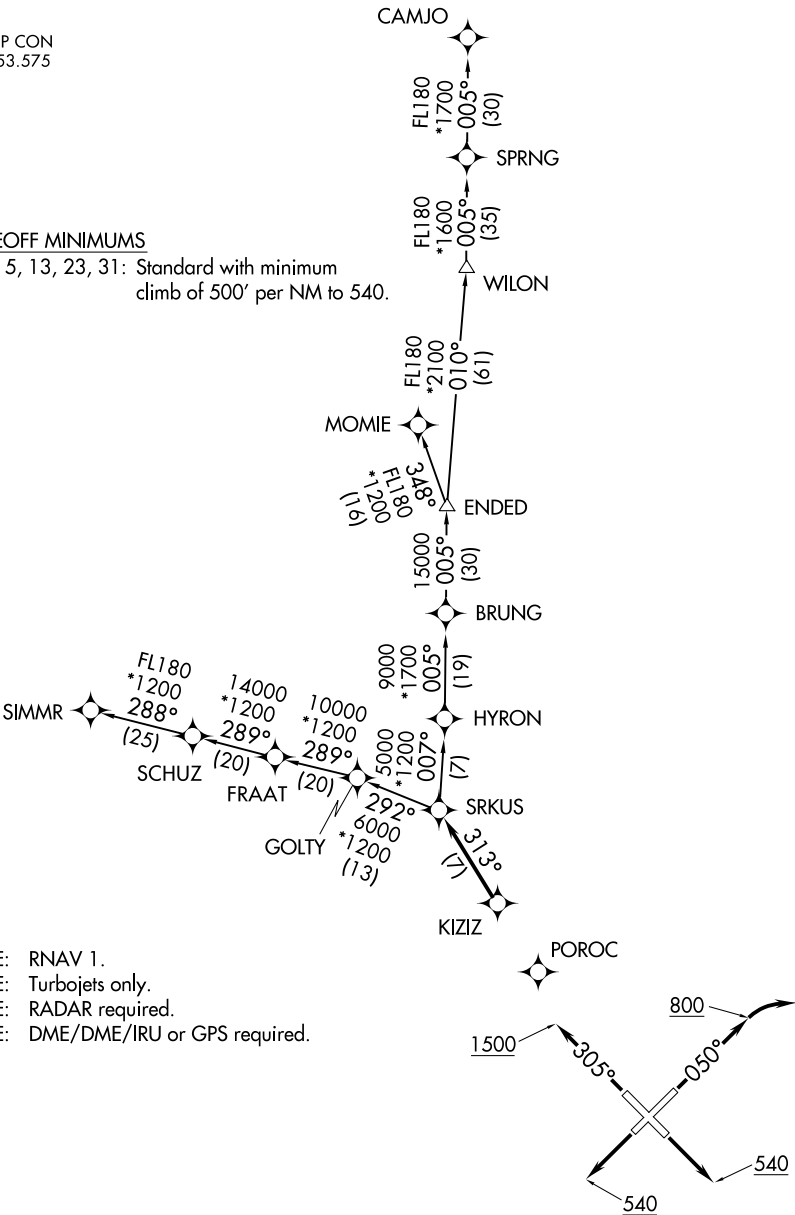

- NOTE: RNAV 1.
- NOTE: Turbojets only.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.

NOTE: Chart not to scale. (NARRATIVE ON FOLLOWING PAGE)