


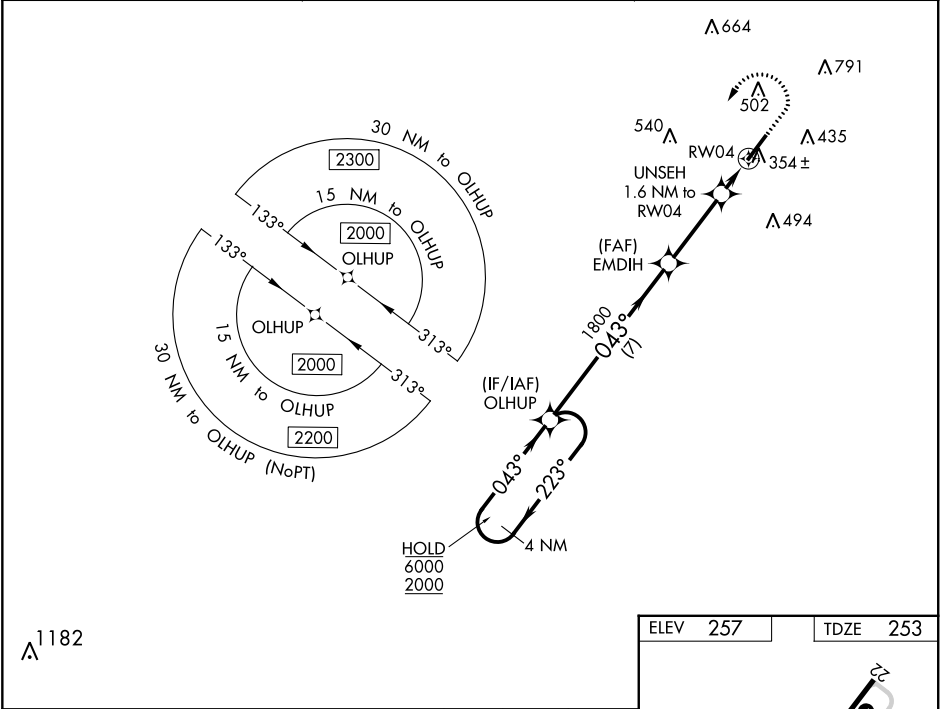
WAAS CH <b>93824</b> <b>W04A</b>	APP CRS <b>043°</b>	Rwy Idg TDZE Apt Elev	<b>6000</b> <b>253</b> <b>257</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

DOUGLAS MUNI (DQH)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C and D visibility to 1 SM.	MALSR 	MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct OLHUP and hold.
--	--	---

AWOS-3 <b>119.075</b>	JACKSONVILLE CENTER <b>127.575 269.025</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---	---------------------------------



4 NM Holding Pattern		OLHUP	EMDIH	UNSEH	RW04
6000 ← 223°		2000 → 043°	1800	1.6 NM to RW04	
GP 3.00°			*800	*1 NM to RW04	
TCH 51					
7 NM		3.1 NM	0.6 NM	1 NM	
CATEGORY	A	B	C	D	
LPV DA		453-½	200 (200-½)		
LNAV/VNAV DA		538-½	285 (300-½)		
LNAV MDA	620-½	367 (400-½)	620-⅝	367 (400-⅝)	
◼ CIRCLING	720-1 463 (500-1)	820-1 563 (600-1)	960-2 703 (800-2)	1160-3 903 (1000-3)	

