


WAAS CH 93513 W01A	APP CRS 010°	Rwy Idg 6604 TDZE 87 Apt Elev 91
--	------------------------	---

RNAV (GPS) RWY 1
H L SONNY CALLAHAN (CQF)

- | | | |
|-----------------|---|--|
| <p>A</p> | <p>Baro-VNAV NA when using Mobile Downtown altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Downtown altimeter setting. When local altimeter setting not received, use Mobile Downtown altimeter setting and increase all DA 42 feet and MDA 60 feet and increase LNAV/VNAV all Cats and LNAV Cat C and D visibility $\frac{1}{8}$ mile.</p> | <p>MISSED APPROACH:
Climb to 700 then climbing left turn to 2000 direct BFM. VORTAC and hold.</p> |
|-----------------|---|--|

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

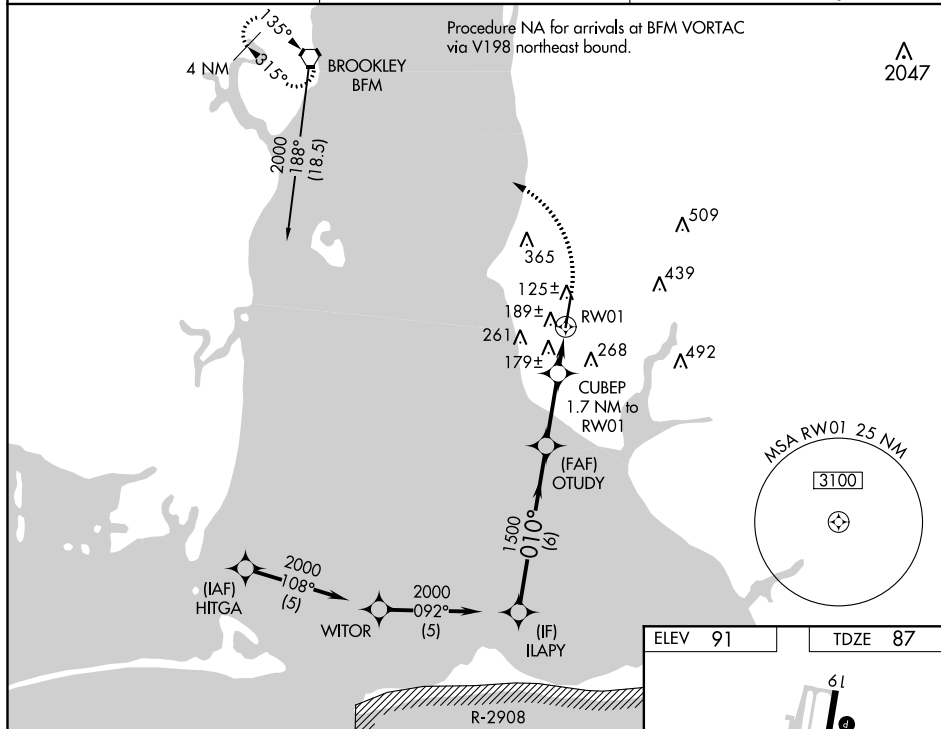

Procedure Turn NA

2000

GP 3.00° TCH 35

ILAPY

010°

1500

OTUDY

1500

CUBEP 1.7 NM to RW01

*1 NM to RW01

*LNNAV only

RW01

6 NM

2.6 NM

0.7 NM

1 NM

CATEGORY	A	B	C	D
LPV DA		287-3 $\frac{3}{4}$	200 (200-3 $\frac{3}{4}$)	
LNNAV/VNAV DA		475-1 $\frac{3}{8}$	388 (400-1 $\frac{3}{8}$)	
LNNAV MDA		440-1	353 (400-1)	
CIRCLING	560-1	469 (500-1)	580-1 $\frac{1}{2}$ 489 (500-1 $\frac{1}{2}$)	660-2 569 (600-2)

