WAAS	APP CRS	Rwy Idg	5509
CH 82318	276°	TDZE	379
W28A		Apt Elev	385

RNAV (GPS) RWY 28

BALDWIN COUNTY RGNL (MLJ)

RNP APCH.

Baro-VNAV and VDP NA when using Middle Georgia Rgnl altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting: increase LPV DA to 754; increase LNAV/VNAV DA to 783 and all visibilities ⅛ SM; increase all MDA 100 feet and LNAV visibility Cats C/D ⅜ SM and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct IBUDY and hold.

AWOS-3	ATLANTA APP CON ★	UNICOM
120.925	124.2 279.6	122.975 (CTAF) L

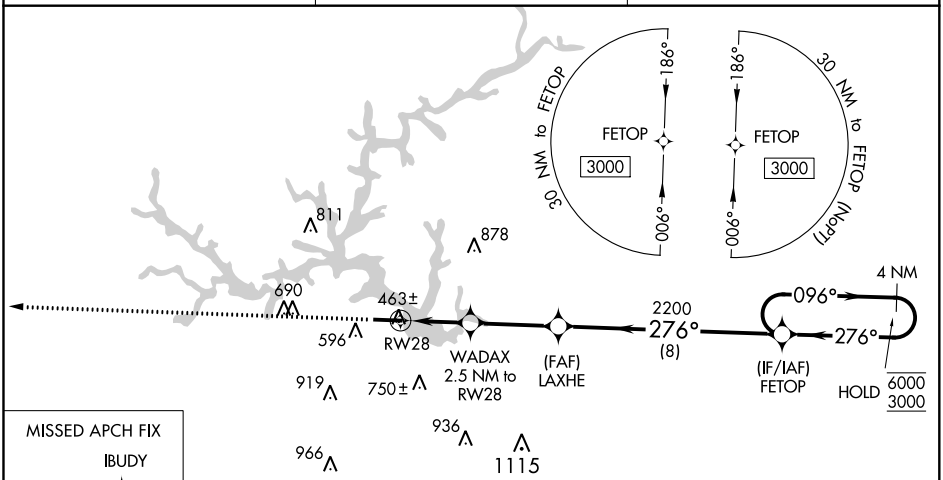

MISSED APCH FIX

IBUDY

096°

276°

4 NM

ELEV 385	TDZE 379



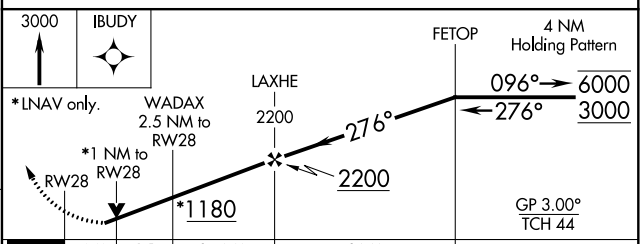

CATEGORY	A	B	C	D
LPV DA	670-1	291 (300-1)		
LNAV/VNAV DA	699-1	320 (400-1)		
LNAV MDA	720-1	341 (400-1)		
C CIRCLING	920-1 535 (600-1)	940-1 555 (600-1)	1100-2 715 (800-2)	1280-3 895 (900-3)

MIRL Rwy 10-28 L

SE-4, 31 DEC 2020 to 28 JAN 2021