

LOC/DME I-EKY  
**111.75**  
Chan **54** (Y)

APP CRS  
**053°**

Rwy Idg  
TDZE **700**  
Apt Elev **700**



ILS or LOC RWY 5  
BESSEMER (EKY)

NA

When local altimeter setting not received, use Alabaster altimeter setting and increase all DA 41 feet, increase all MDA 60 feet and increase S-LOC 5 Cat C and D visibility ¼ mile. Increase JURAM Fix S-LOC Cat C and D visibility ¼ mile. VDP NA with Alabaster altimeter setting.

MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct OKW VORTAC and hold.

AWOS-3PT <b>118.825</b>	BIRMINGHAM APP CON <b>124.9 351.85</b>	CLNC DEL <b>123.75</b>	UNICOM <b>123.0</b> (CTAF) <b>0</b>
----------------------------	---	---------------------------	--

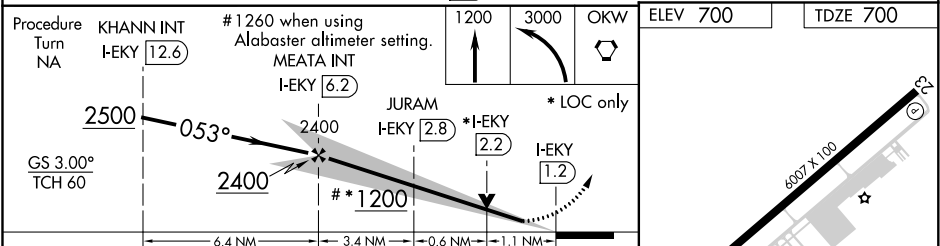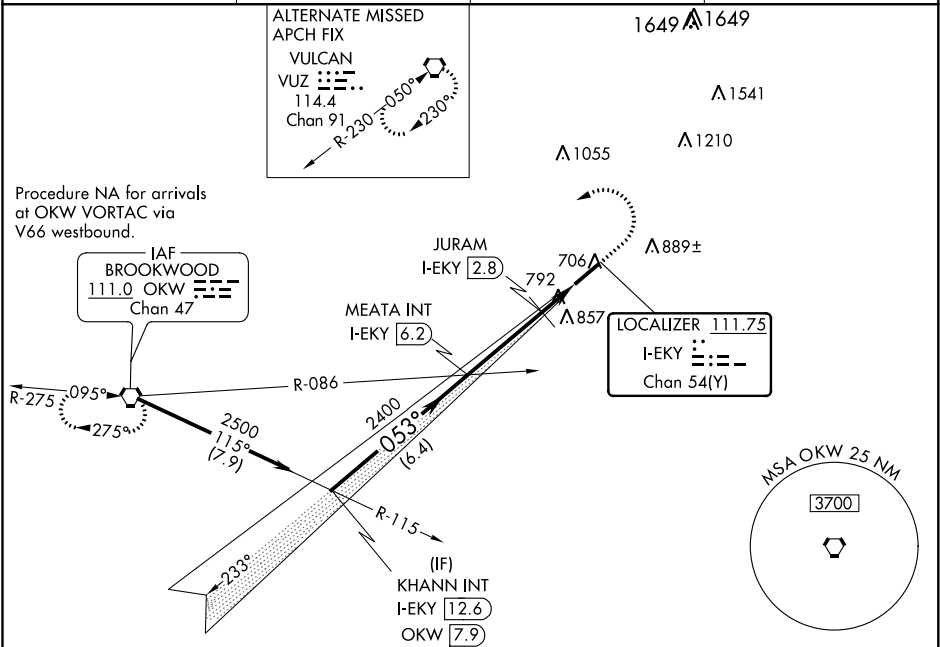

CATEGORY	A	B	C	D
S-ILS 5	900-3/4 200 (200-3/4)			
S-LOC 5	1200-1	500 (500-1)	1200-1 1/4 500 (500-1 1/4)	1200-1 1/2 500 (500-1 1/2)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1260-2 560 (600-2)
JURAM FIX MINIMUMS				
S-LOC 5	1100-1 400 (400-1)			1100-1 1/4 400 (400-1 1/4)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1260-2 560 (600-2)

HIRL Rwy 5-23 0

REIL Rwy 5 and 23 0

FAF to MAP 5.1 NM

Knots

60 90 120 150 180

Min:Seq

5:06 3:24 2:33 2:02 1:42