


APP CRS	Rwy Idg	5001
244°	TDZE	150
	Apt Elev	150

RNAV (GPS) RWY 24

GEORGE DOWNER (AIV)

<div><div>▽</div><div>NA</div></div> <div>DME/DME RNP-0.3 NA. Use Tuscaloosa altimeter setting; when not received, use Columbus/W Point/Starkville altimeter setting and increase all MDAs 20 feet, and Circling Cat C visibility ¼ SM. Procedure NA at night. Rwy 24 helicopter visibility reduction below 1 SM NA.</div>	<div>MISSED APPROACH: Climb to 3000 direct ZESLO and hold.</div>
--	--

TCL ASOS 132.825	COLUMBUS APP CON 135.6 323.275	UNICOM 122.8 (CTAF) 0
---------------------	-----------------------------------	--------------------------

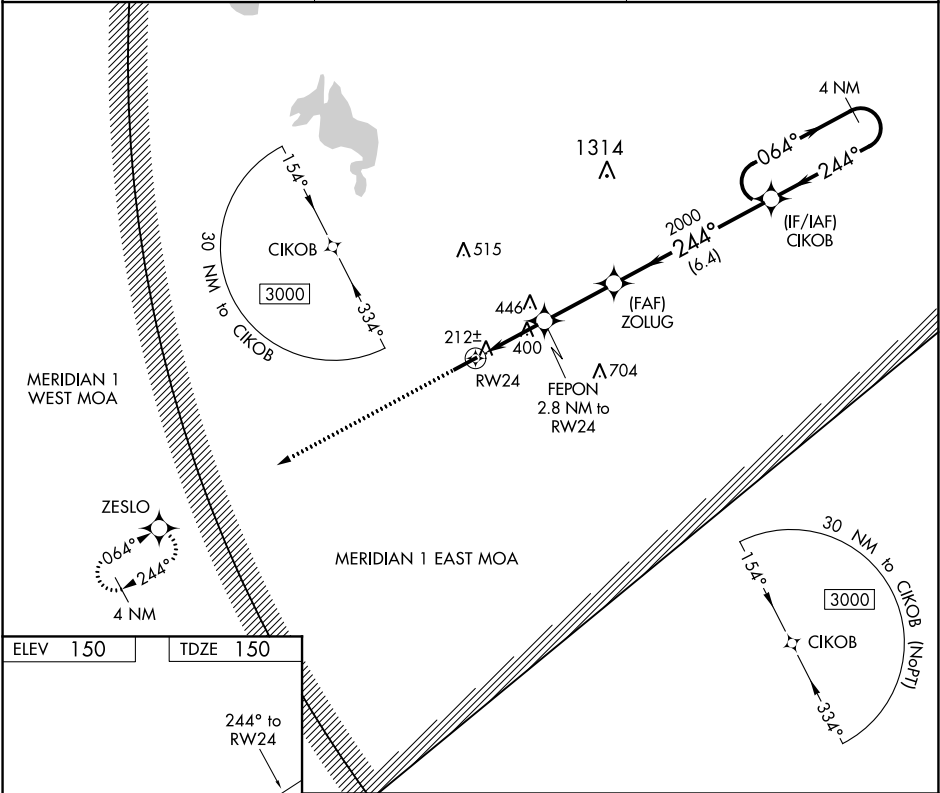

ELEV 150	TDZE 150	Visual Segment - Obstacles.			
3000 ZESLO		ZOLUG		CIKOB 4 NM Holding Pattern	
244° to RW24		FEPON 2.8 NM to RW24		064° 3000	
5001 X 80		RW24		244°	
3000		1100		2000	
2.8 NM		2.8 NM		6.4 NM	
CATEGORY	A	B	C	D	
LNAV MDA	740-1	590 (600-1)	740-1¾	590 (600-1¾)	
CIRCLING	740-1	590 (600-1)	820-1¾ 670 (700-1¾)	900-2½ 750 (800-2½)	