

WAAS CH 99319 W04A	APP CRS 042°	Rwy Idg TDZE 4312 Apt Elev 4314
---------------------------------	------------------------	---


RNAV (GPS) RWY 4

DEMING MUNI (DMN)

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 40°C (104°F). VDP and Baro-VNAV NA when using Las Cruces altimeter setting. When local altimeter setting not received, use Las Cruces altimeter setting and increase all DA 114 feet and all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ½ mile, increase LNAV Cats C and D visibility ½ mile, increase Circling Cat B visibility ¼ mile and Cats C and D visibility ½ mile. Rwy 4 helicopter visibility reduction below ¾ SM NA. Circling Rwy 8, 22 NA at night.

MISSED APPROACH:
Climb to 7100 direct JUTEP and hold.

ASOS 118.525	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

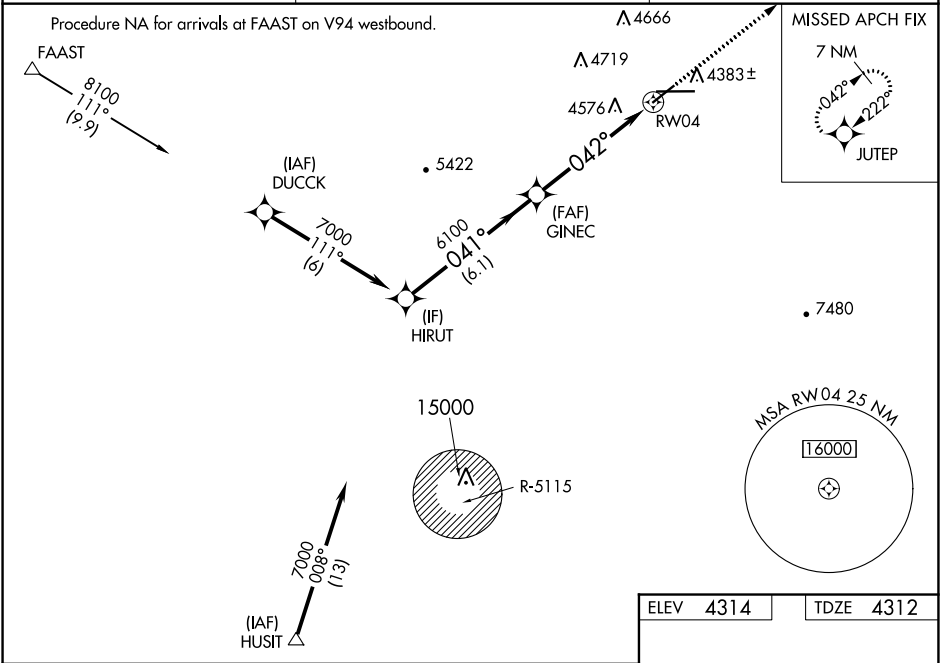

Procedure Turn NA

HIRUT

7000

041°

6100

042°

GINEC

6100

1.7 NM to RW04

RW04

7100

JUTEP

* LNAV only.

GP 3.00°

TCH 45

6.1 NM

3.7 NM

1.7 NM

CATEGORY	A	B	C	D
LPV DA	4562-1 250 (300-1)			
LNAV/VNAV DA	4945-2 ¼ 633 (700-2 ¼)			
LNAV MDA	4880-1 568 (600-1)	4880-1 ½ 568 (600-1 ½)	4880-1 ¾ 568 (600-1 ¾)	
CIRCLING	4880-1 566 (600-1)	4940-1 626 (700-1)	5020-2 706 (800-2)	5020-2 ¼ 706 (800-2 ¼)

ELEV 4314

TDZE 4312

MIRL Rwy 4-22

MIRL Rwy 8-26 0

042° to RW04

8018 X 75

0.3% DOWN

0.3% UP

5675 X 60