

LOC I-CVN 108.9	APP CRS 037°	Rwy Idg TDZE Apt Elev	7200 4205 4216
---------------------------	------------------------	-----------------------------	-------------------------------------------

ILS or LOC RWY 4

CLOVIS MUNI (CVN)

▼


NA

When local altimeter setting not received, use Cannon AFB altimeter setting and increase all DA and MDA 40 feet. For inop MALSRL, increase S-LOC 4 Cat C/D visibility to 1 3/8 mile. For inop MALSRL when using Cannon AFB, increase S-LOC 4 Cat C/D visibility to 1 3/8 mile.

MALSRL

MISSED APPROACH: Climb to 4700 then climbing right turn to 6000 direct TXO VORTAC and hold.

AWOS-3PT 135.375	CANNON APP CON 118.425 352.1	CLNC DEL 119.0	UNICOM 122.8 (CTAF) 0
----------------------------	----------------------------------------	--------------------------	---------------------------------

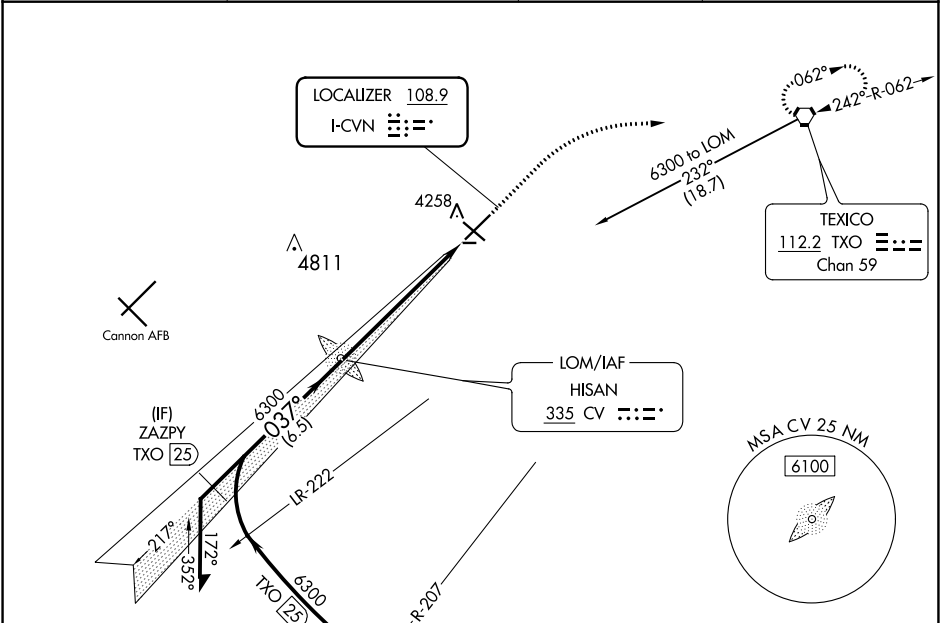

ELEV 4216

TDZE 4205

CATEGORY	A	B	C	D
S-ILS 4	4405-1/2 200 (200-1/2)			
S-LOC 4	4680-1/2	475 (500-1/2)	4680-1	475 (500-1)
CIRCLING	4680-1	464 (500-1)	4700-1 1/2 484 (500-1 1/2)	4820-2 604 (700-2)

Knots

Min:Sec

60

90

120

150

180

6:12

4:08

3:06

2:29

2:04