


WAAS CH 73008 W15A	APP CRS 151°	Rwy Idg TDZE Apt Elev	5431 352 352
----------------------------------------	------------------------	-----------------------------	-----------------------------------------

RNAV (GPS) RWY 15

RED BLUFF MUNI (RBL)

RNP APCH.	<p>⚠ Circling to Rwy 33 NA at night. Baro-VNAV and VDP NA when using Redding altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. When local altimeter setting not received; use Redding altimeter setting and increase LPV DA to 674 feet and increase LNAV/VNAV DA to 860 feet and increase visibility all Cats ½ SM; increase all MDAs 80 feet and LNAV visibility Cats C/D ½ SM and Circling visibility Cats C/D ½ SM.</p>	MISSED APPROACH: Climb to 3500 direct TOWAN and hold.
-----------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------

ASOS 120.775	OAKLAND CENTER 132.2 350.3	UNICOM 123.0 (CTAF) 0
------------------------	--------------------------------------	---------------------------------

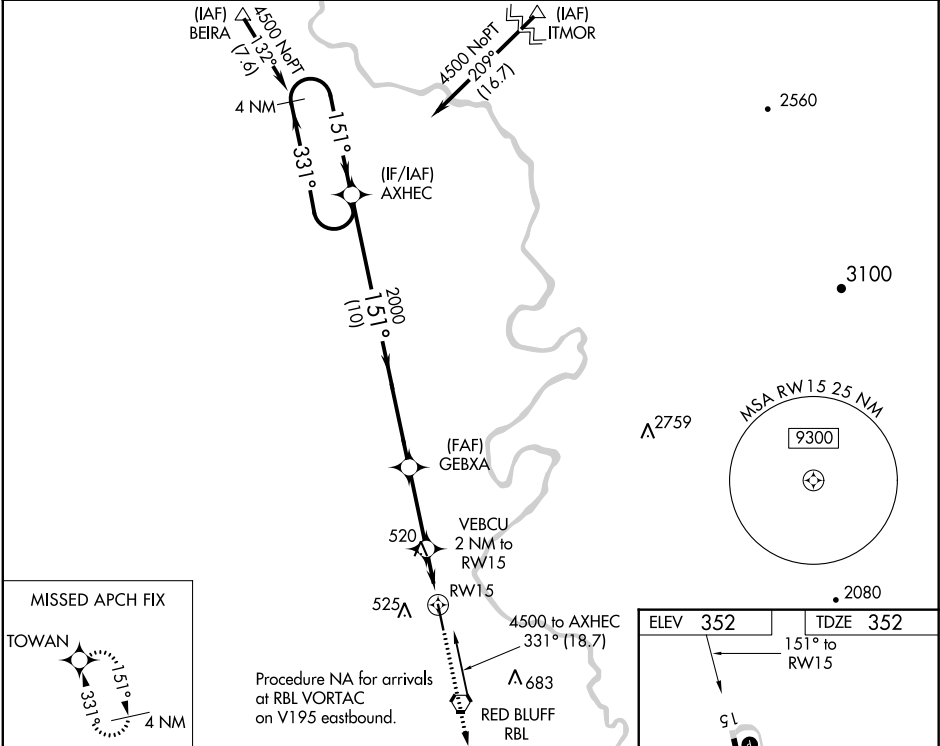

4 NM Holding Pattern 4500 ← 331° 151° →		AXHEC	GEBXA	VEBCU 2 NM to RW15	3500 TOWAN
GP 3.00° TCH 40°		2000	2000	*1.2 NM to RW15	*LNAV only RW15
		10 NM	3.1 NM	0.8	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	602-7/8		250 (300-7/8)		
LNAV/VNAV DA	788-1 1/4		436 (500-1 1/4)		
LNAV MDA	780-1 428 (500-1)		780-1 1/4 428 (500-1 1/4)		
CIRCLING	860-1 508 (600-1)		900-1 1/2 548 (600-1 1/2)		1060-2 1/4 708 (800-2 1/4)

