WAAS CH 72623 W07A	APP CRS 075°	Rwy ldg 5954 TDZE 37 Apt Elev 45

RNAV (GPS) RWY 7
OXNARD (OXR)

Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP -0.3 NA. When local altimeter setting not received, use Camarillo altimeter setting and increase all DA 18 feet and all MDA 20 feet, increase Circling Cat D visibility ¼ mile.

MISSED APPROACH: Climb to 500, then climbing right turn to 3000 direct UVICA and hold.

ATIS	POINT MUGU APP CON★	OXNARD TOWER★	GND CON
118.05	124.7 335.5	134.95 (CTAF) L 257.8	121.9

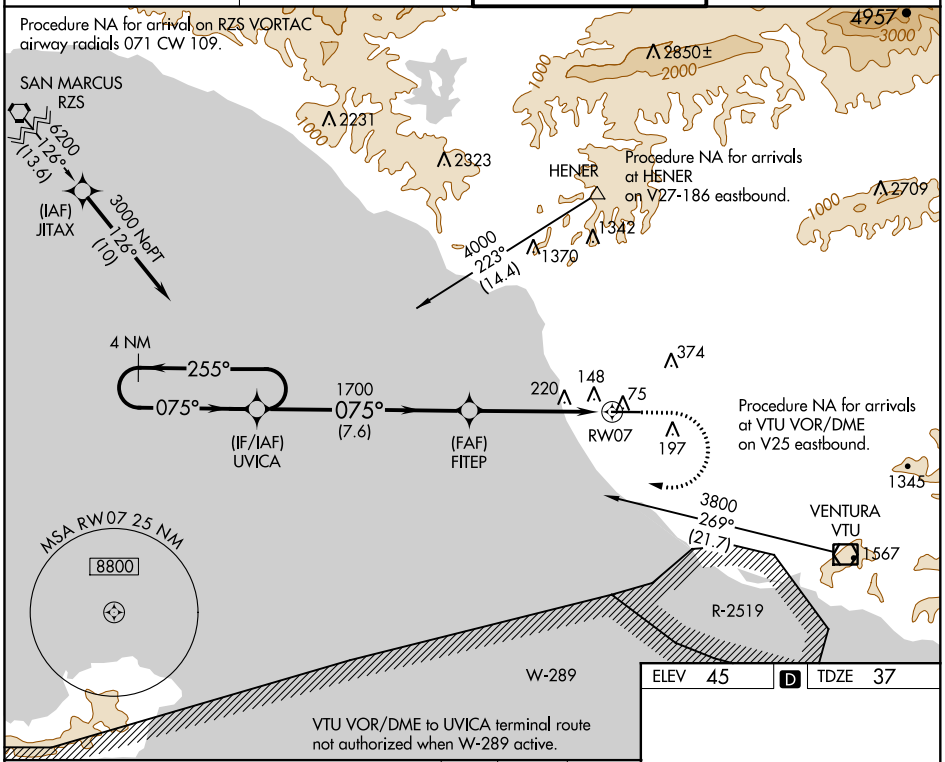

ELEV 45 D TDZE 37

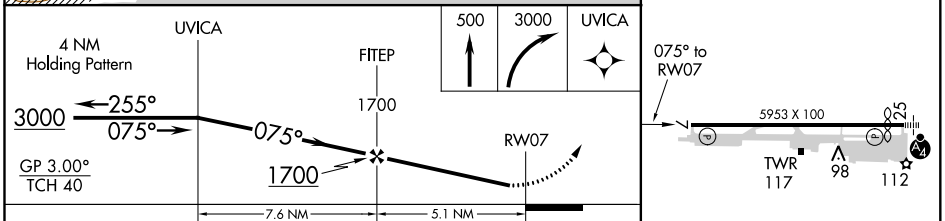

CATEGORY	A	B	C	D
LPV DA	287-1 250 (300-1)			
LNAV/VNAV DA	319-1 282 (300-1)			
LNAV MDA	480-1 443 (500-1)		480-1⅜ 443 (500-1⅜)	
CIRCLING	500-1 455 (500-1)		500-1½ 455 (500-1½)	700-2 655 (700-2)

REIL Rwy 7 L
MIRL Rwy 7-25 L

SW-3, 31 DEC 2020 to 28 JAN 2021

SW-3, 31 DEC 2020 to 28 JAN 2021