


APP CRS	Rwy Idg	10591
078°	TDZE	1118
	Apt Elev	1135

RNAV (RNP) Z RWY 8


PHOENIX SKY HARBOR INTL (PHX)

▼ GPS required. Visibility reduction by helicopters NA.
For uncompensated Baro-VNAV systems, procedure NA below 1°C (34°F) or above 46°C (116°F).
For inoperative MALSF, increase RNP 0.13 all Cats visibility to 1¼, and RNP 0.30 all Cats visibility to 1¾.

MALSF


MISSED APPROACH: Climb to 5000
via track 078° to YOKXO and via track
114° to IWA VORTAC and hold.

D-ATIS	PHOENIX APP CON	PHOENIX TOWER	GND CON	CLNC DEL	CPDLC
127.575	128.65 353.9	118.7 278.8 (Rwy 8-26) 120.9 254.3 (Rwy 7L-25R, 7R-25L)	119.75 269.2 (N) 132.55 269.2 (S)	118.1 269.2	

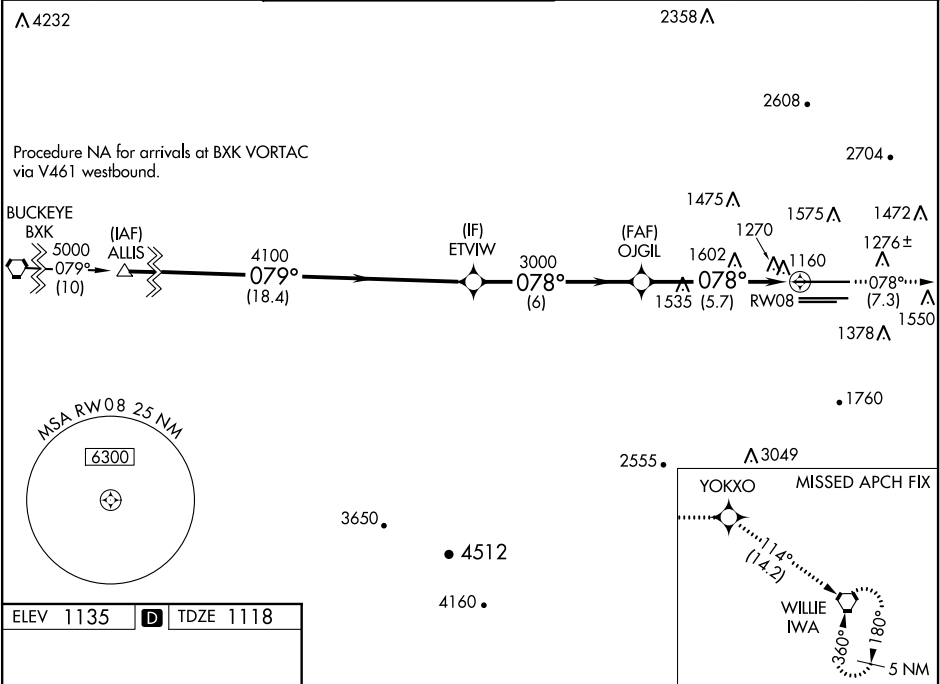

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 69°).

5000 YOKXO IWA
tr 078° tr 114°

ALLIS Procedure Turn NA ETVIW OJGIL RW08

5000 4100 3000

GP 3.00° TCH 54

18.4 NM 6 NM 5.7 NM

CATEGORY	A	B	C	D
RNP 0.13 DA	1478-1 360 (400-1)			
RNP 0.30 DA	1603-1½ 485 (500-1½)			

AUTHORIZATION REQUIRED

HIRL Rwy 8-26, 7L-25R and 7R-25L
REIL Rwy 26

SW-4, 31 DEC 2020 to 28 JAN 2021

SW-4, 31 DEC 2020 to 28 JAN 2021