


WAAS CH <b>72917</b> <b>W07A</b>	APP CRS <b>074°</b>	Rwy Idg TDZE Apt Elev	<b>7299</b> <b>1460</b> <b>1478</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7R  
PHOENIX DEER VALLEY (DVT)

<div><div>⚠</div><div>When VGSI inop, Circling Rwy 25R NA at night. Baro-VNAV NA when using Scottsdale altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. VDP NA when using Scottsdale altimeter setting. When local altimeter setting not received, use Scottsdale altimeter setting: Increase LPV DA to 1822 and all visibilities ½ SM. Increase LNAV/VNAV DA to 2160, increase all MDA's 40 feet and increase Circling Cat B/C visibility ¼ mile. Circling NA north of Rwy 7R-25L at night.</div></div> <div><div>MISSED APPROACH:</div><div>Climb to 5000 direct VIFPE and track 069° to AVENT and hold, continue climb-in-hold to 5000. When directed by ATC, continue climb-in-hold to 7000.</div></div>
---

ATIS <b>126.5</b>	PHOENIX APP CON <b>120.7 239.0</b>	DEER VALLEY TOWER ★ <b>118.4</b> (070°-250°) (CTAF) <b>120.2</b> (251°-069°)	GND CON <b>121.8</b>	CLNC DEL <b>123.9</b>	UNICOM <b>122.95</b>
----------------------	---------------------------------------	--	-------------------------	--------------------------	-------------------------

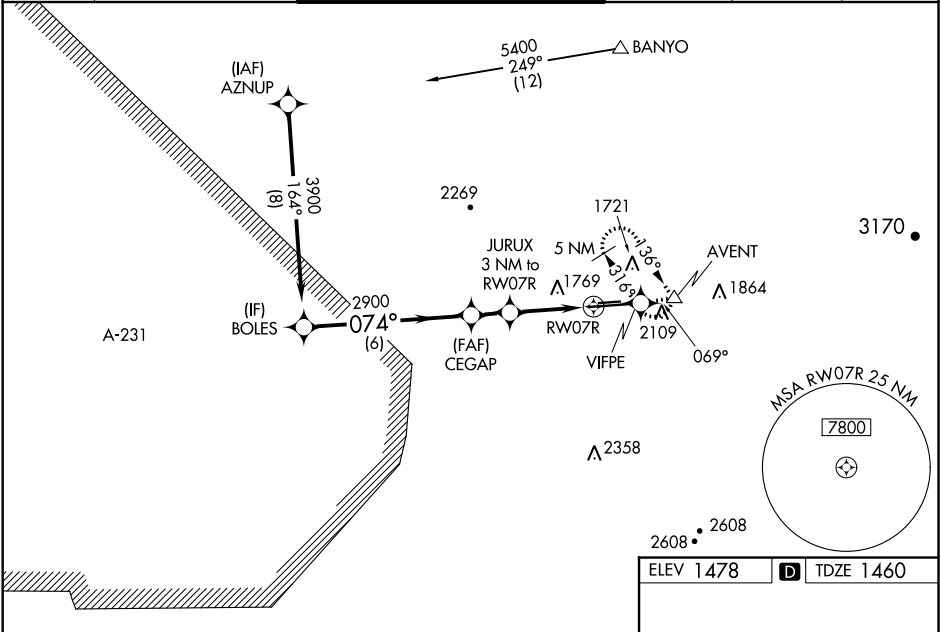

	BOLES	CEGAP	JURUX 3 NM to RWY 7R	*LNAV only	AVENT
	3900	2900	*2440		
	GP 3.00° TCH 42				
	6 NM	1.4 NM	1.2 NM	1.8 NM	
CATEGORY	A	B	C	D	
LPV DA		1795-1½	335 (400-1½)		
LNAV/VNAV DA		2133-2½	673 (700-2½)		
LNAV MDA	2060-1	600 (600-1)	2060-1¾	600 (600-1¾)	
CIRCLING	2400-1¼ 922 (1000-1¼)	2420-1¼ 942 (1000-1¼)	2420-2¾ 942 (1000-2¾)	2460-3 982 (1000-3)	

